


NOTES:

1. PEDESTRIAN AND RESIDENTIAL USE ONLY.
2. DESIGN, MATERIAL AND CONSTRUCTION GUIDELINES TO FOLLOW ICPI GUIDE SPECIFICATIONS.
3. PAVER SURFACES SLOPE: MAX. 1%
4. SOIL SUBGRADE MAX. SLOPE: 1/2%
5. THICKER BASE AND/OR DRAIN PIPES MAY BE REQUIRED IF PATIO RECEIVES RUNOFF FROM ADJACENT IMPERVIOUS SURFACES OR ROOFS.
6. CAST-IN-PLACE CONCRETE CURBS CAN BE WITHOUT PAVERS ON TOP. IN SUCH CASES, CURBS SHOULD BE LEVEL WITH CONCRETE PAVER FIELD.




PERMEABLE INTERLOCKING CONCRETE PAVEMENT DRIVEWAY WITH CONCRETE CURBS

DRAWING NO.

ICPI-77a


SCALE

NO SCALE

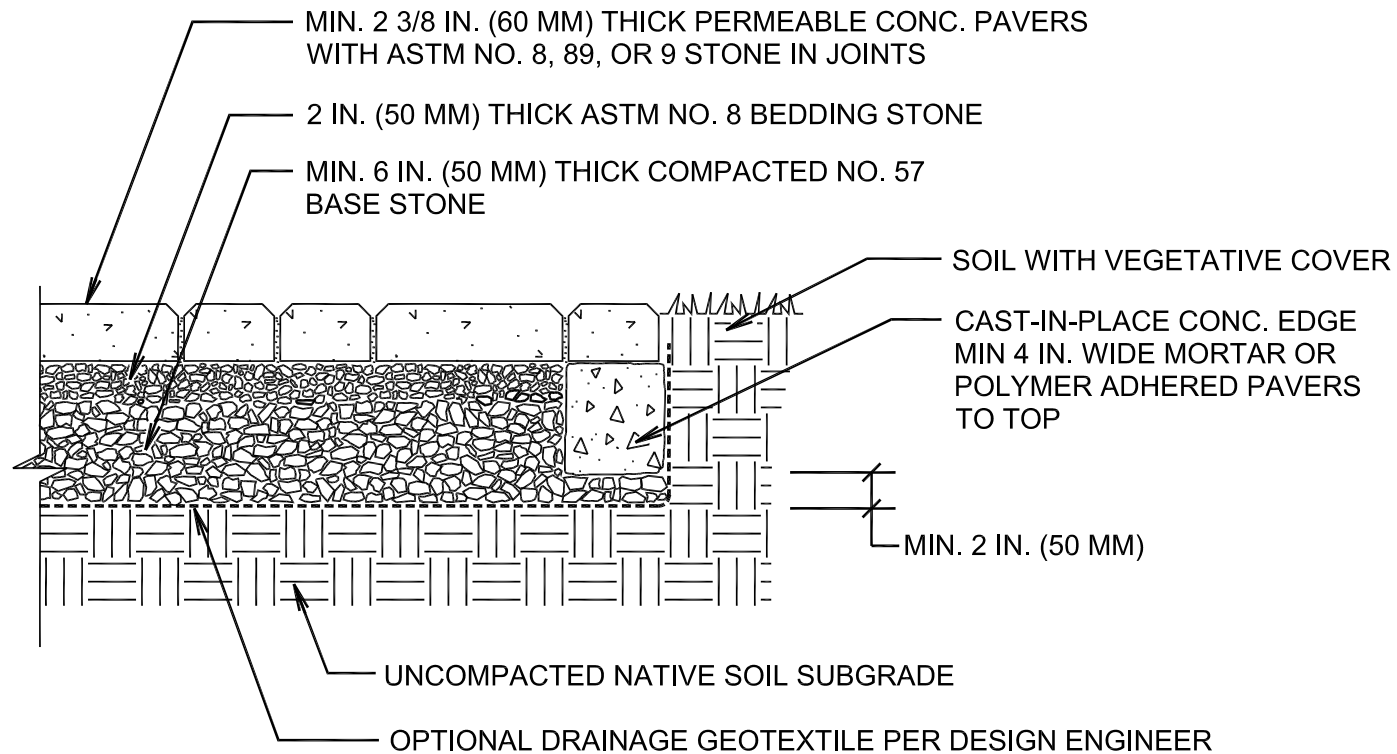

NOTES:

1. PEDESTRIAN AND RESIDENTIAL USE ONLY.
2. DESIGN, MATERIAL AND CONSTRUCTION GUIDELINES TO FOLLOW ICPI GUIDE SPECIFICATIONS.
3. PAVER SURFACES SLOPE: MAX. 1%
4. SOIL SUBGRADE MAX. SLOPE: 1/2%
5. THICKER BASE AND/OR DRAIN PIPES MAY BE REQUIRED IF PATIO RECEIVES RUNOFF FROM ADJACENT IMPERVIOUS SURFACES OR ROOFS.
6. CAST-IN-PLACE CONCRETE CURBS CAN BE WITHOUT PAVERS ON TOP. IN SUCH CASES, CURBS SHOULD BE LEVEL WITH CONCRETE PAVER FIELD.
7. SELECT GEOTEXTILE PER AASHTO M 288.




PERMEABLE INTERLOCKING CONCRETE PAVEMENT PATIO WITH CONCRETE CURBS

DRAWING NO.

ICPI-77


SCALE

NO SCALE

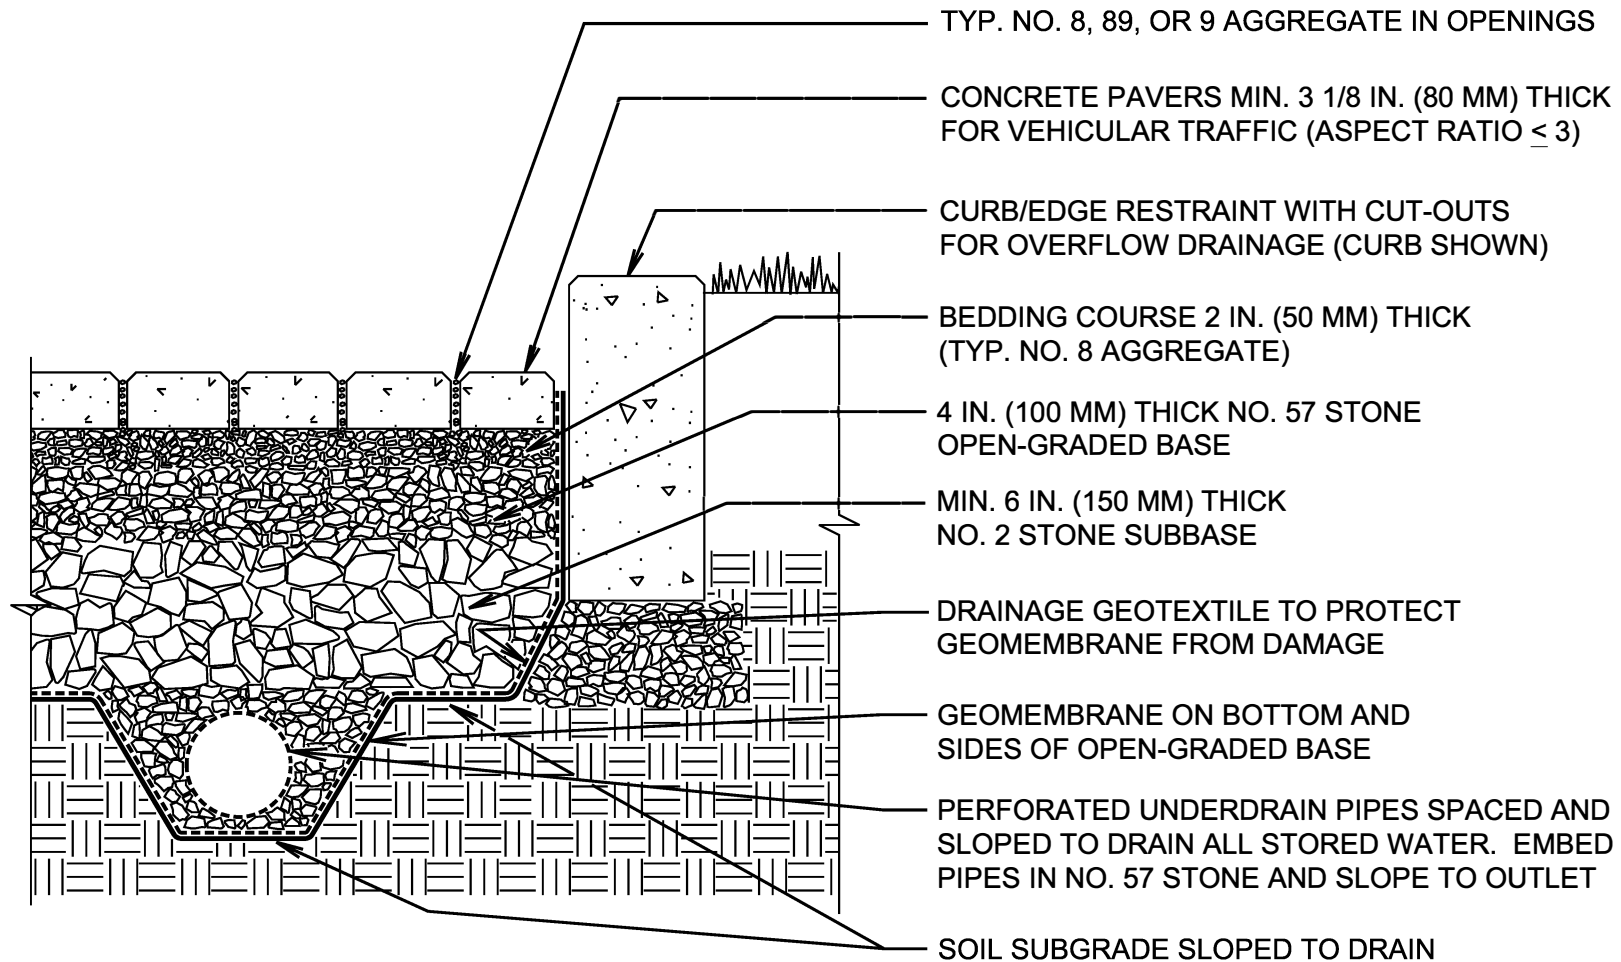

NOTES:

1. 2 3/8 IN. (60 MM) THICK PAVERS MAY BE USED IN RESIDENTIAL APPLICATIONS.
2. NO. 2 STONE SUBBASE THICKNESS VARIES WITH DESIGN. NO. 3 OR NO. 4 STONE IS ACCEPTABLE. CONSULT ICPI PERMEABLE INTERLOCKING CONCRETE PAVEMENT MANUAL.
3. PERFORATED PIPES MAY BE RAISED FOR WATER STORAGE FROM LARGE RAIN EVENTS WITH OUTLET(S) AT LINER BOTTOM TO DRAIN SMALL RAIN EVENTS.
4. SELECT GEOTEXTILE PER AASHTO M 288.



PERMEABLE PAVEMENT WITH NO
INFILTRATION TO SOIL SUBGRADE

DRAWING NO.

ICPI-70

SCALE

NO SCALE