

Gude Landfill

Landfill Gas Monitoring Report

Fourth Quarter 2016
(October 2016 – December 2016)

Prepared By:

CB&I
16406 U.S. Route 224 East
Findlay, Ohio 45840

For the:

Gude Landfill

Presented To:

Maryland Department of the Environment
1800 Washington Blvd. Suite 605
Baltimore, MD 21230

December 30th, 2016

Table of Contents

Section	Page
1 Background	1
2 Subsurface Methane Monitoring	1
3 Explosive Gas Monitoring Within On-Site Structures	3
4 Weekly Subsurface Methane Monitoring At Property Boundary	4
5 Methane Mitigation Plan	4

List of Tables

No.	Page
1 Summary of Quarterly Subsurface Methane Monitoring	2

List of Figures

No.	
1	Methane Monitoring Locations

Appendices

A	Field Data
B	Quarterly Probe Data

1. BACKGROUND

The Montgomery County Department of Environmental Protection, Division of Solid Waste Services (DEP/DSWS) prepared and obtained Maryland Department of the Environment (MDE) approval for a Landfill Gas Monitoring Plan (LFGMP) for the closed Gude Landfill on April 22, 2009. The LFGMP presents information and procedures necessary to implement a landfill gas (LFG) monitoring program for the Gude Landfill. The Gude Landfill is owned and maintained by DEP/DSWS. The Gude Landfill is located at 600 E. Gude Drive, Rockville, Maryland in Montgomery County.

The LFGMP requires quarterly LFG monitoring of the monitoring wells located along the Gude Landfill property boundary and within on-site structures. In addition, DEP conducts weekly LFG monitoring of the wells located along the property boundary. The LFG monitoring is performed to assess the potential for subsurface migration of LFG, specifically, for the presence of methane gas beyond the landfill property.

The regulatory standard concerning the collection and monitoring of explosive gases (i.e. methane) at solid waste landfills in Maryland is established in the Code of Maryland Regulations (COMAR) Title 26, Subtitle 4, Chapter 7, Part 03B(9) – COMAR 26.04.07.03B(9) – “*A facility may not be designed or operated in such a manner that the concentration of explosive gases generated by the facility exceeds 25 percent of the lower explosive limits for the gases in facility structures, excluding gas control or recovery system components, and the lower explosive limit for the gases at the property boundary.*” According to this standard, methane concentrations resulting from the presence of LFG in on-site structures at Gude Landfill cannot exceed 25 percent of the lower explosive limit (LEL) (1.25 percent by volume), and methane concentrations cannot exceed 100 percent of the LEL (5.00 percent by volume) at the Gude Landfill property boundary.

2. SUBSURFACE METHANE MONITORING

The Gude Landfill currently has **twenty-four (24)** permanent LFG compliance monitoring wells that are located along the southern and northwest property boundary. Ten (10) of the **twenty-four (24)** permanent LFG monitoring wells were installed in June 2010 **and seven (7)** were installed in December 2016. The LFG monitoring wells consist of multi-depth probes at differing depths: shallow (s) at 10-15 feet; intermediate (i) at 23-28 feet; and deep (d) at 33-38 feet that are spaced at intervals of approximately 300 feet. Several of the wells are single-depth probes due to shallow groundwater conditions. The monitoring wells provide a media through which LFG can be measured from various depths from the adjacent fill area. The monitoring wells are numbered W-01 through W-11 on the northwest slope and W-25 through W-30 on the south slope. All monitoring locations can be found on the attached **Figure 1**. The proposed monitoring well located between W-10 and W-11 could not be installed due to competent rock and construction and demolition material encountered in the subsurface.

On December 28, 2016 CB&I performed the Fourth Quarter 2016 (October – December 2016) monitoring event for the LFG monitoring wells along the Gude Landfill property boundary. CB&I utilized a Landtec GEM 5000 Infrared Gas Analyzer (GEM) to monitor for

the following parameters within the LFG monitoring wells: methane, carbon dioxide, oxygen, balance gas (assumed to be nitrogen) and relative pressure (static pressure). The procedure for the monitoring is as follows. A quick connect fitting is attached to both ends of the inlet tubing, which is attached to the GEM and into the corresponding fitting on each LFG monitoring well. The GEM pump is then turned on, which creates a vacuum on the LFG monitoring well and sampling (i.e. monitoring) is initiated. Continuous monitoring is performed on the LFG until all readings stabilize, for a period of not less than one minute, after which the reading is saved. Table 1 below (and **Appendix A**), summarizes the monitoring data for the LFG monitoring wells.

Two methane exceedances were found in the LFG monitoring wells during this quarterly monitoring event.

TABLE 1
SUMMARY OF QUARTERLY SUBSURFACE METHANE MONITORING
(December 28, 2016)

Monitoring Well Name	CH ₄ %vol	CO ₂ %vol	O ₂ %vol	Balance (%vol)	Relative Pressure (in. H ₂ O)
MW01	0.1	2.6	19.3	78	0
MW02	0.1	0.1	22.2	77.6	-0.04
MW03S	0.1	0.8	22	77.1	-0.06
MW03I	0.1	0.3	22.6	77	-0.02
MW03D	0.2	0.2	22.7	76.9	-2.24
MW04S	0.1	0.8	22.3	76.8	0.01
MW04I	0.1	0.2	23	76.7	0
MW04D	0.1	0.2	23.1	76.6	-0.02
MW05S	0.1	0.3	20.8	78.8	-0.01
MW05I	0.1	0.1	21	78.8	-0.06
MW05D	0.1	0.1	21.1	78.7	-0.07
MW06S	0.1	0.9	20.6	78.4	0.02
MW06I	0.1	0.2	21.2	78.5	0
MW06D	0.1	0.1	21.2	78.6	-0.06
MW07S	0.2	1.1	20	78.7	0
MW07I	0.1	0.2	20.8	78.9	-0.01
MW08S	0.3	2.5	17.9	79.3	-0.01
MW08I	0.4	1.5	18.9	79.2	-0.02
MW08D	0.2	0.8	19.8	79.2	-0.02
MW09S	0.1	0.6	20.5	78.8	-0.01
MW09I	0.1	1.4	20.2	78.3	-0.01
MW09D	0.1	0.2	20.8	78.9	-0.05

Monitoring Well Name	CH ₄ %vol	CO ₂ %vol	O ₂ %vol	Balance (%vol)	Relative Pressure (in. H ₂ O)
MW10S	0.1	0.9	20.4	78.6	0.01
MW10I	0.1	2.5	19.4	78	0.02
MW10D	0.1	0.2	20.8	78.9	0.01
MW11	0.1	2.8	20.3	76.8	0.05
MW12	0.1	0.7	20.2	79	0.01
MW13	0.1	2	19.7	78.2	0
MW14	0.1	1.9	19.8	78.2	0
MW15	0.1	4.6	7.1	88.2	0.01
MW16	0.1	1.5	19.3	79.1	-0.02
MW17	0.1	7.8	16.9	75.2	0.01
MW18	39.4	23.9	0.8	35.9	0.01
MW25S	0.1	2.9	18.4	78.6	0.03
MW25D	0.1	2.2	19.6	78.1	0.03
MW26S	0.1	4.9	17.7	77.3	0.87
MW27	0.1	2.9	18.3	78.7	0.02
MW28	6	3.7	9.9	80.4	0.01
MW29	0.1	0.3	20.1	79.5	0
MW30	0.1	1.8	19.3	78.8	0

Note 1. % vol. = Percent by Volume

Note 2. in. H₂O. = Inches of Water

3. EXPLOSIVE GAS MONITORING WITHIN ON-SITE STRUCTURES

At the Gude Landfill, six (6) structures are monitored for the presence of explosive gas as part of the quarterly LFG monitoring: Men's Shelter and Redevelopment Expansion; LFG Flare Station Shed; and Landfill Gas-to-Energy Facility Storage Container, Switchgear Enclosure, and the Former Power Plant Building.

On December 28, 2016 CB&I performed the Fourth Quarter 2016 monitoring event. Using the GEM 5000 and a Combustible Gas Monitor with sample pump, CB&I conducted methane monitoring inside the on-site structures located at the Oaks Landfill. The GEM 5000 measures methane (% vol.), carbon dioxide (% vol.), oxygen (% vol.), and gas balance (% vol.). The Combustible Gas Monitor measures CH₄ (ppm) and O₂ (% volume). CB&I Staff walked through the interiors of the structures and monitored the perimeter wall interface, floor to wall interface in hallways and rooms, floor penetrations, and other likely potential gas pathways as well as the exterior perimeter of the structures.

No combustible gas (e.g. methane) was detected in any of the six (6) buildings at the Gude Landfill during the quarterly monitoring event.

3. WEEKLY SUBSURFACE METHANE MONITORING AT PROPERTY BOUNDARY

Monitoring Results

In addition to the CB&I quarterly LFG monitoring, DEP performs weekly monitoring of the LFG monitoring wells that are located along the Gude Landfill property boundary. In accordance with the LFGMP and supplemental correspondence with MDE, LFG (i.e. methane) exceedances that were measured as part of the DEP weekly monitoring are presented in this quarterly report. Documentation and explanation of the measured methane gas exceedances (of previous quarterly monitoring events) and corresponding response actions to mitigate the exceedance are also provided herein.

During the Fourth Quarter 2016, measured concentrations of methane in W28 intermittently exceeded existing MDE regulatory requirements. It is likely that the measured methane exceedances were due to a combination of factors: water logged conditions in the subsurface, and changing subsurface conditions due to waste mass decomposition, waste in close proximity to the property line, and some intermittent system downtime.

As a result of the methane exceedances, CB&I performed well field adjustments to improve vacuum and conducted follow-up gas monitoring. All monitoring wells, are currently in compliance and all, except W 1 8 a n d W28 (intermittent exceedances), remained fully in compliance during the entire Fourth Quarter of 2016.

Appendix B presents a summary of the methane exceedances that were recorded by DEP during the Third Quarter of 2016.

a. METHANE MITIGATION PLAN

As a result of methane exceedances, a methane mitigation plan was implemented in the First Quarter 2010. The plan includes multiple steps to take to remediate gas being detected in the monitoring network. In some instances where wellfield adjustments were insufficient to control elevated methane concentrations, the County has elected to expand the collection system to control migration. In January of 2014, four additional LFG extraction wells were installed in the vicinity of W-18 and W-28S in response to elevated methane detected in that area. In May of 2014, two LFG extraction wells were installed to control methane migration in the area of probes W-05 and W-06 after wellfield adjustments did not decrease the methane concentrations below 5 percent by volume.

During the Fourth Quarter of 2016 frequent gas detections have reoccurred at probe W-18 and W-28S. As an initial response to these detections several adjustments have been made to the collection system to try to exert more vacuum on the adjacent LFG extraction wells. The vacuum was increased at the blower/flare station and the wellfield was adjusted in the vicinity of the probes to increase the gas collection from this area of the landfill. Adjacent wells were also checked for high water levels, but high water levels were not detected in any wells. The methane mitigation activities

performed during this quarter were successful in decreasing the methane concentrations in these probes to below 5 percent by volume before the Fourth Quarter 2016 monitoring event.

The County and CB&I will continue to implement portions of the methane mitigation plan as necessary to keep the site in compliance with subsurface methane requirements. The County is currently investigating expansion of the LFG collection system to allow for improved gas collection in the area of W-18 and W-28S.

Figures

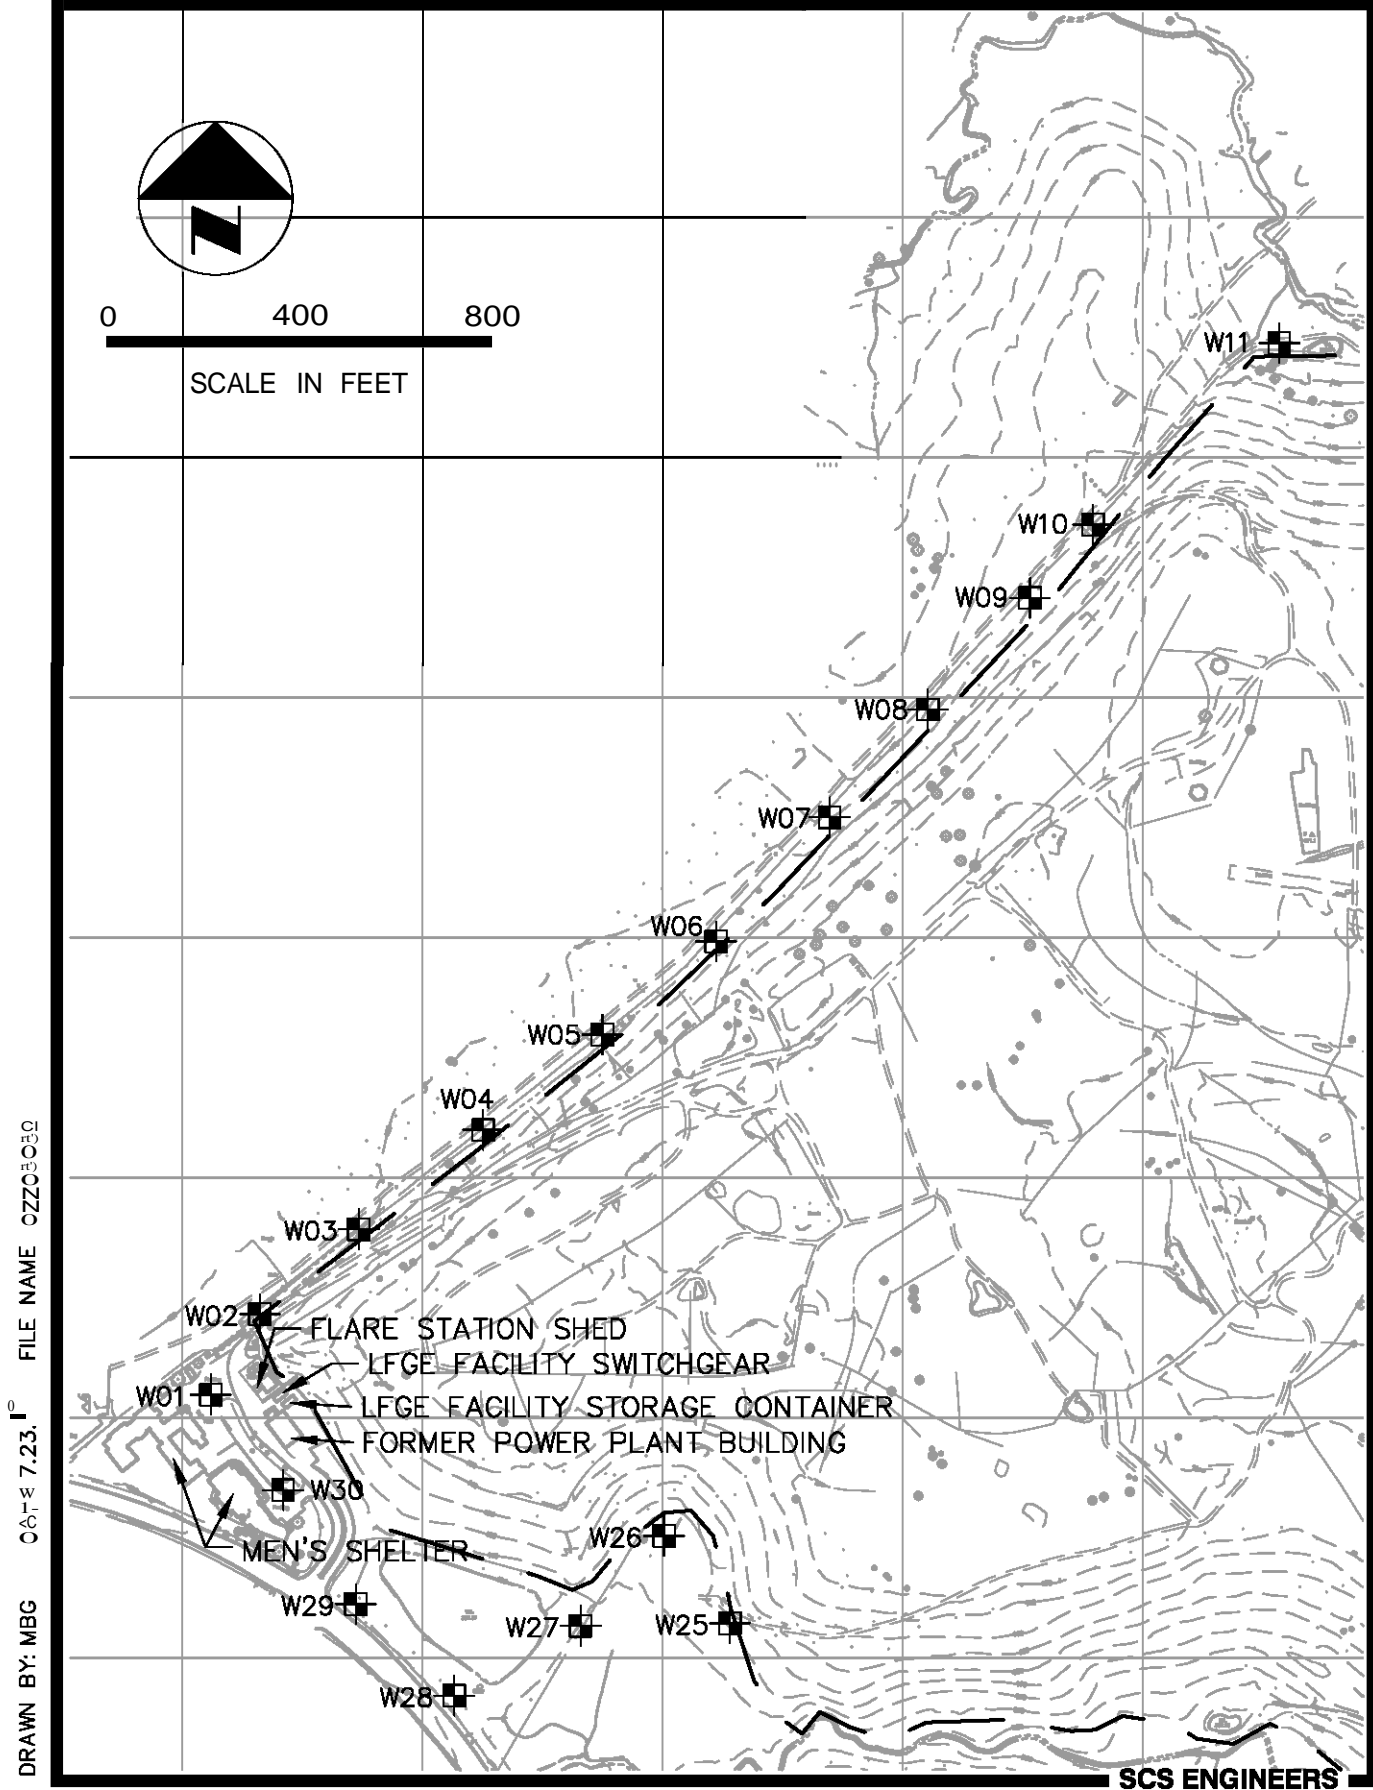


FIGURE 1 - METHANE MONITORING LOCATIONS

Appendix A

Field Data

Table 2 - Gude Landfill - 2016 4th Quarter Monitoring Probe Results

Name	Date/Time	CH4 (% by vol.)	CO2 (% by vol.)	O2 (% by vol.)	Balance (% by vol.)	Relative Pressure (in-WC)	COMMENTS
MW01	8:22 AM	0.1	2.6	19.3	78	0	
MW02	8:25 AM	0.1	0.1	22.2	77.6	-0.04	
MW03S	8:35 AM	0.1	0.8	22	77.1	-0.06	
MW03I	8:37 AM	0.1	0.3	22.6	77	-0.02	
MW03D	8:39 AM	0.2	0.2	22.7	76.9	-2.24	
MW04S	8:42 AM	0.1	0.8	22.3	76.8	0.01	
MW04I	8:43 AM	0.1	0.2	23	76.7	0	
MW04D	8:45 AM	0.1	0.2	23.1	76.6	-0.02	
MW05S	8:49 AM	0.1	0.3	20.8	78.8	-0.01	
MW05I	8:51 AM	0.1	0.1	21	78.8	-0.06	
MW05D	8:53 AM	0.1	0.1	21.1	78.7	-0.07	
MW06S	8:56 AM	0.1	0.9	20.6	78.4	0.02	
MW06I	8:57 AM	0.1	0.2	21.2	78.5	0	
MW06D	8:59 AM	0.1	0.1	21.2	78.6	-0.06	
MW07S	9:02 AM	0.2	1.1	20	78.7	0	
MW07I	9:04 AM	0.1	0.2	20.8	78.9	-0.01	
MW08S	9:07 AM	0.3	2.5	17.9	79.3	-0.01	
MW08I	9:09 AM	0.4	1.5	18.9	79.2	-0.02	
MW08D	9:10 AM	0.2	0.8	19.8	79.2	-0.02	
MW09S	9:13 AM	0.1	0.6	20.5	78.8	-0.01	
MW09I	9:14 AM	0.1	1.4	20.2	78.3	-0.01	
MW09D	9:16 AM	0.1	0.2	20.8	78.9	-0.05	
MW10S	9:18 AM	0.1	0.9	20.4	78.6	0.01	
MW10I	9:20 AM	0.1	2.5	19.4	78	0.02	
MW10D	9:21 AM	0.1	0.2	20.8	78.9	0.01	
MW11	9:24 AM	0.1	2.8	20.3	76.8	0.05	
MW12	9:27 AM	0.1	0.7	20.2	79	0.01	New probe
MW13	9:32 AM	0.1	2	19.7	78.2	0	New probe
MW14	9:35 AM	0.1	1.9	19.8	78.2	0	New probe
MW15	9:42 AM	0.1	4.6	7.1	88.2	0.01	New probe
MW16	9:47 AM	0.1	1.5	19.3	79.1	-0.02	New probe
MW17	9:51 AM	0.1	7.8	16.9	75.2	0.01	New probe

Name	Date/Time	CH4 (% by vol.)	CO2 (% by vol.)	O2 (% by vol.)	Balance (% by vol.)	Relative Pressure (in-WC)	COMMENTS
MW18	10:00 AM	39.4	23.9	0.8	35.9	0.01	New probe/ Increased CH4
MW25S	10:11 AM	0.1	2.9	18.4	78.6	0.03	
MW25D	10:12 AM	0.1	2.2	19.6	78.1	0.03	
MW26S	10:15 AM	0.1	4.9	17.7	77.3	0.87	
MW27	10:19 AM	0.1	2.9	18.3	78.7	0.02	
MW28	10:21 AM	6	3.7	9.9	80.4	0.01	Increased CH4
MW29	10:24 AM	0.1	0.3	20.1	79.5	0	
MW30	10:27 AM	0.1	1.8	19.3	78.8	0	

