

Americana Finnmark
Condo Assn.

**PROJECT
SITE**

Forest Estates
Community Assn.

Forest Grove
Citizen Assn.

Northmont
Citizens Assn.

Woodside Forest
Citizens Assn.

Holy Cross
Hospital Medical
Adult Day Center

**HOLY CROSS
HOSPITAL**

Forest Glen
Metro Station
Parking Lot

Forest Glen
Medical Center

Existing Tunnel
From Parking
Lot To Metro Station

Forest Glen
Metro Station

Montgomery Hills
Baptist Church

The Siena
School

Forest Glen
Civic Assn.

Linden
Civic Assn.

MARYLAND
97

MARYLAND
192

495

GEORGIA AVENUE

CAPITAL BELTWAY

FOREST GLEN ROAD

SHERWOOD ROAD

MYRTLE ROAD

WOODLAND DRIVE

SAXONY ROAD

ADMIRALTY DRIVE

DAMERON DRIVE

FLORA LANE


LANSDOWNE WAY

LANSDOWNE WAY

WESTVIEW DRIVE


COLERIDGE DRIVE



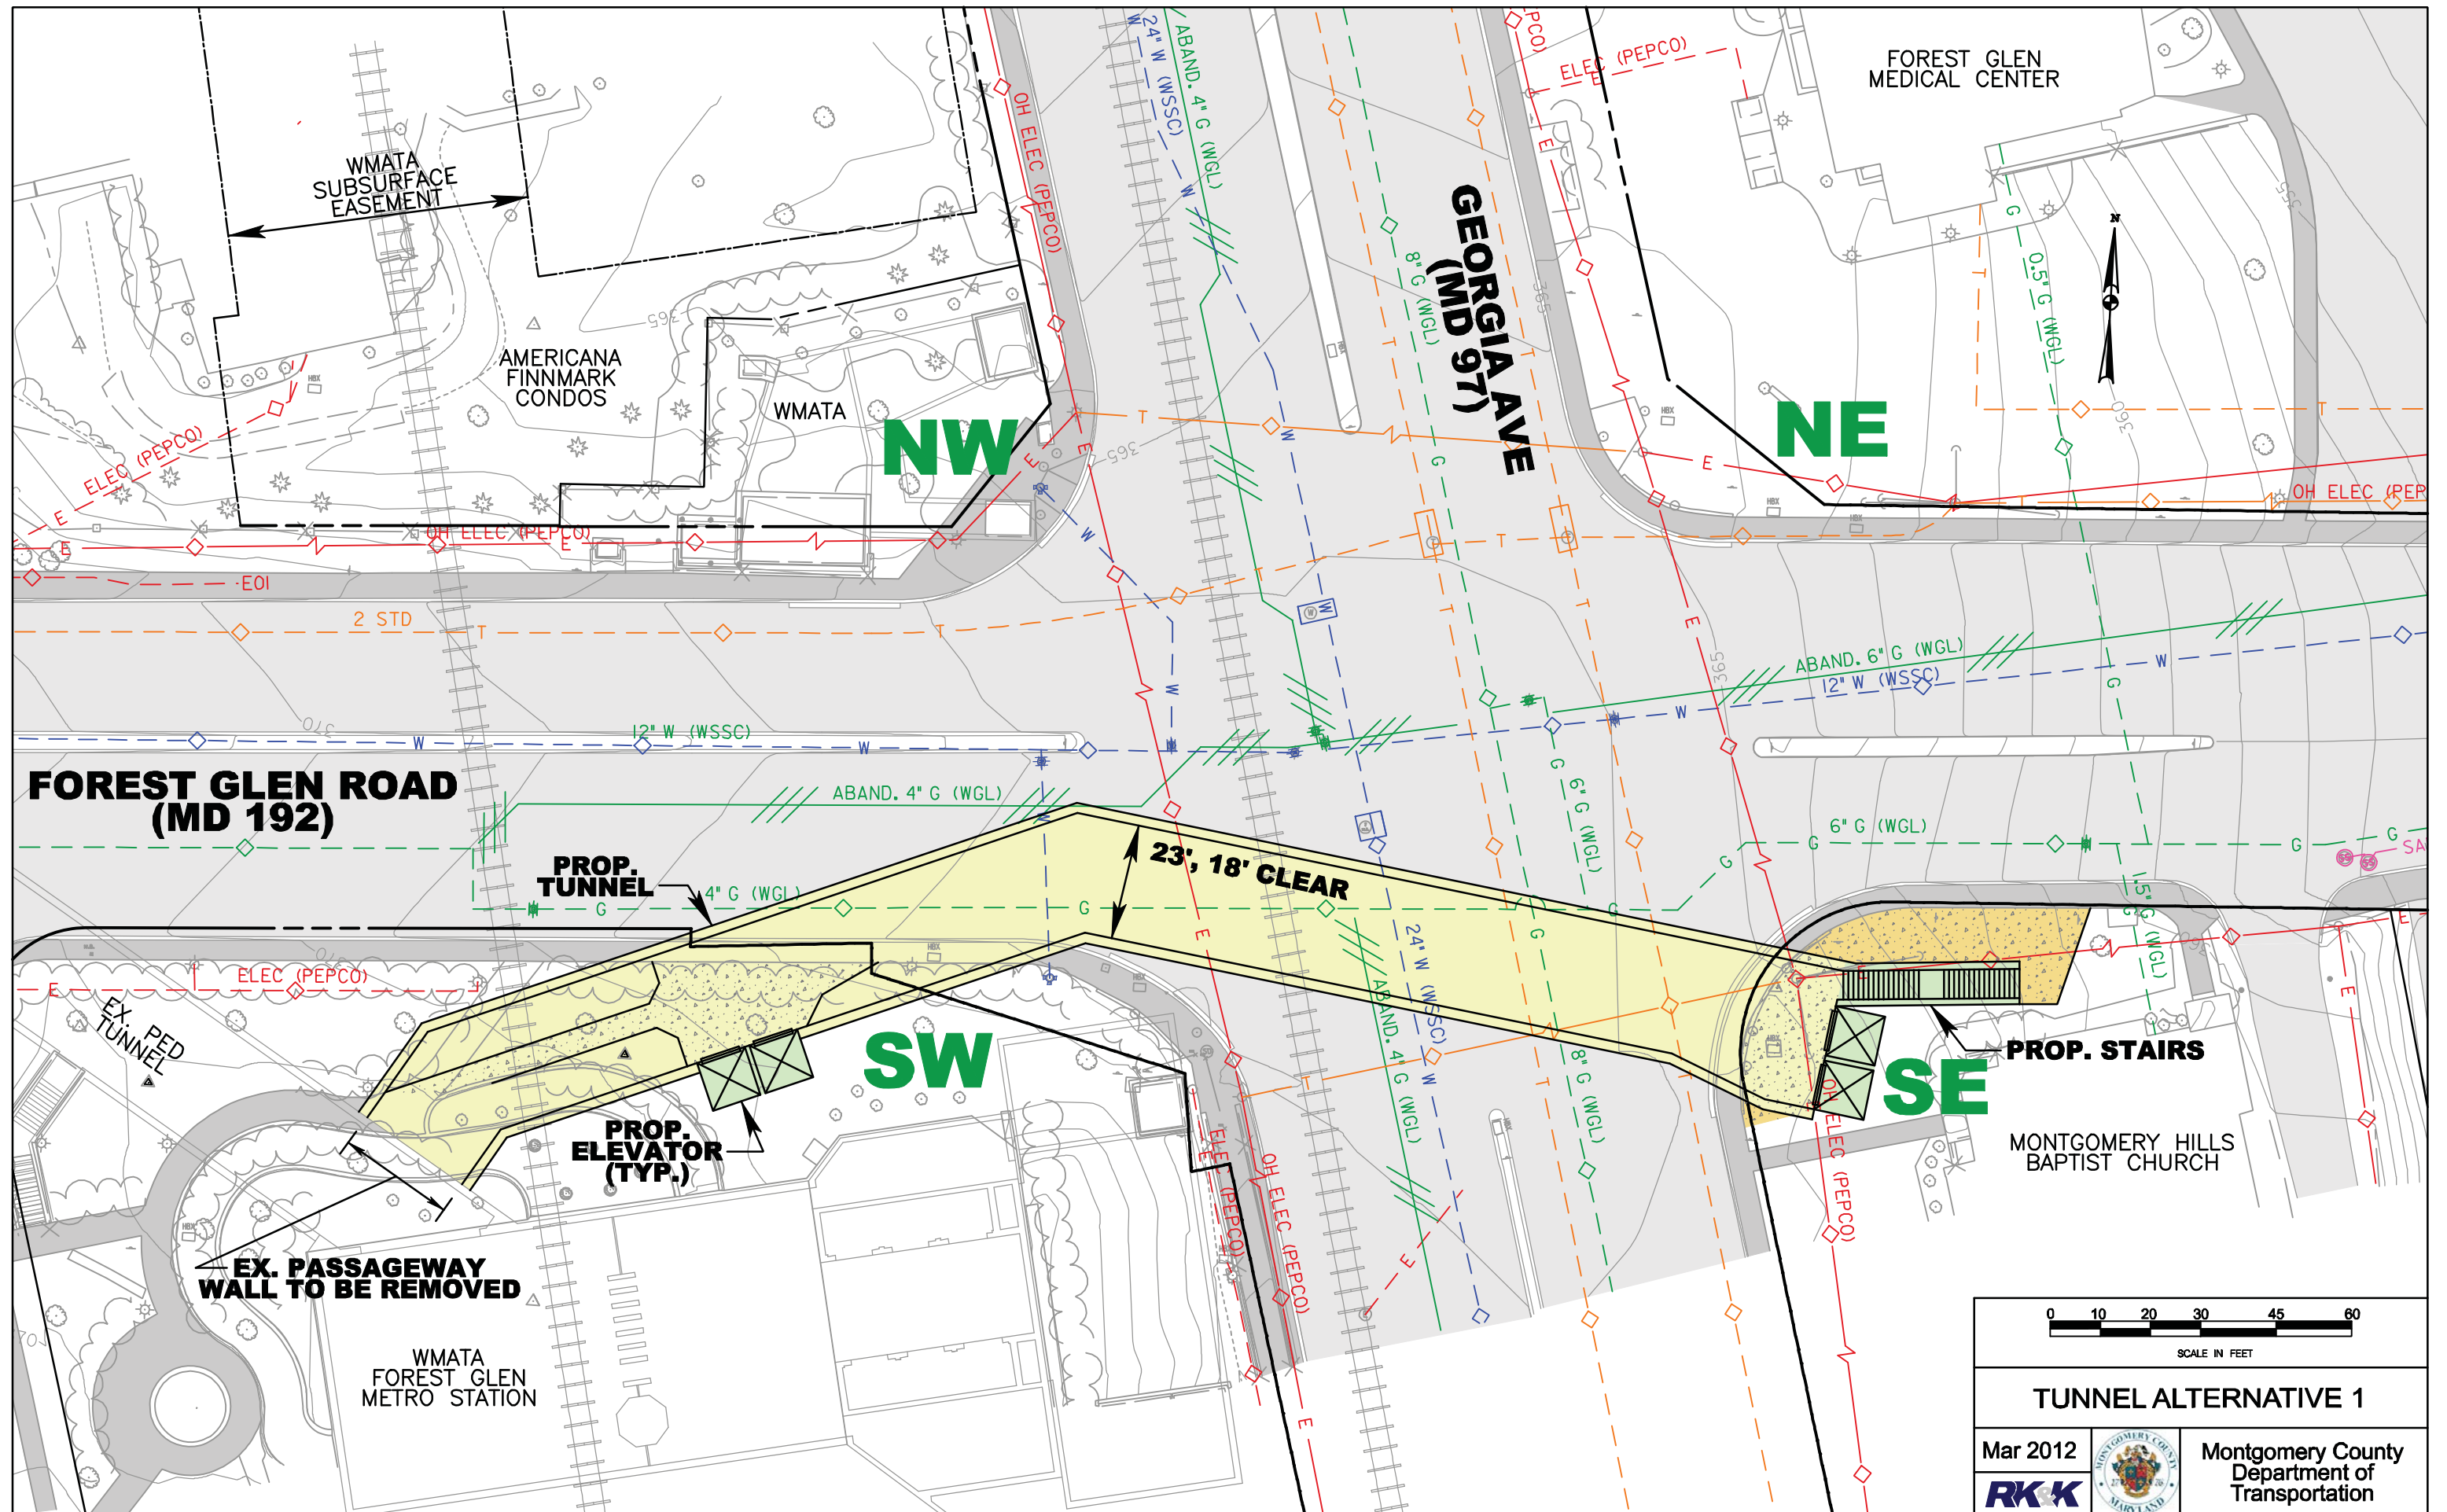



Looking the portal of Tunnel Alternative 1 at the SE quadrant from the NE quadrant

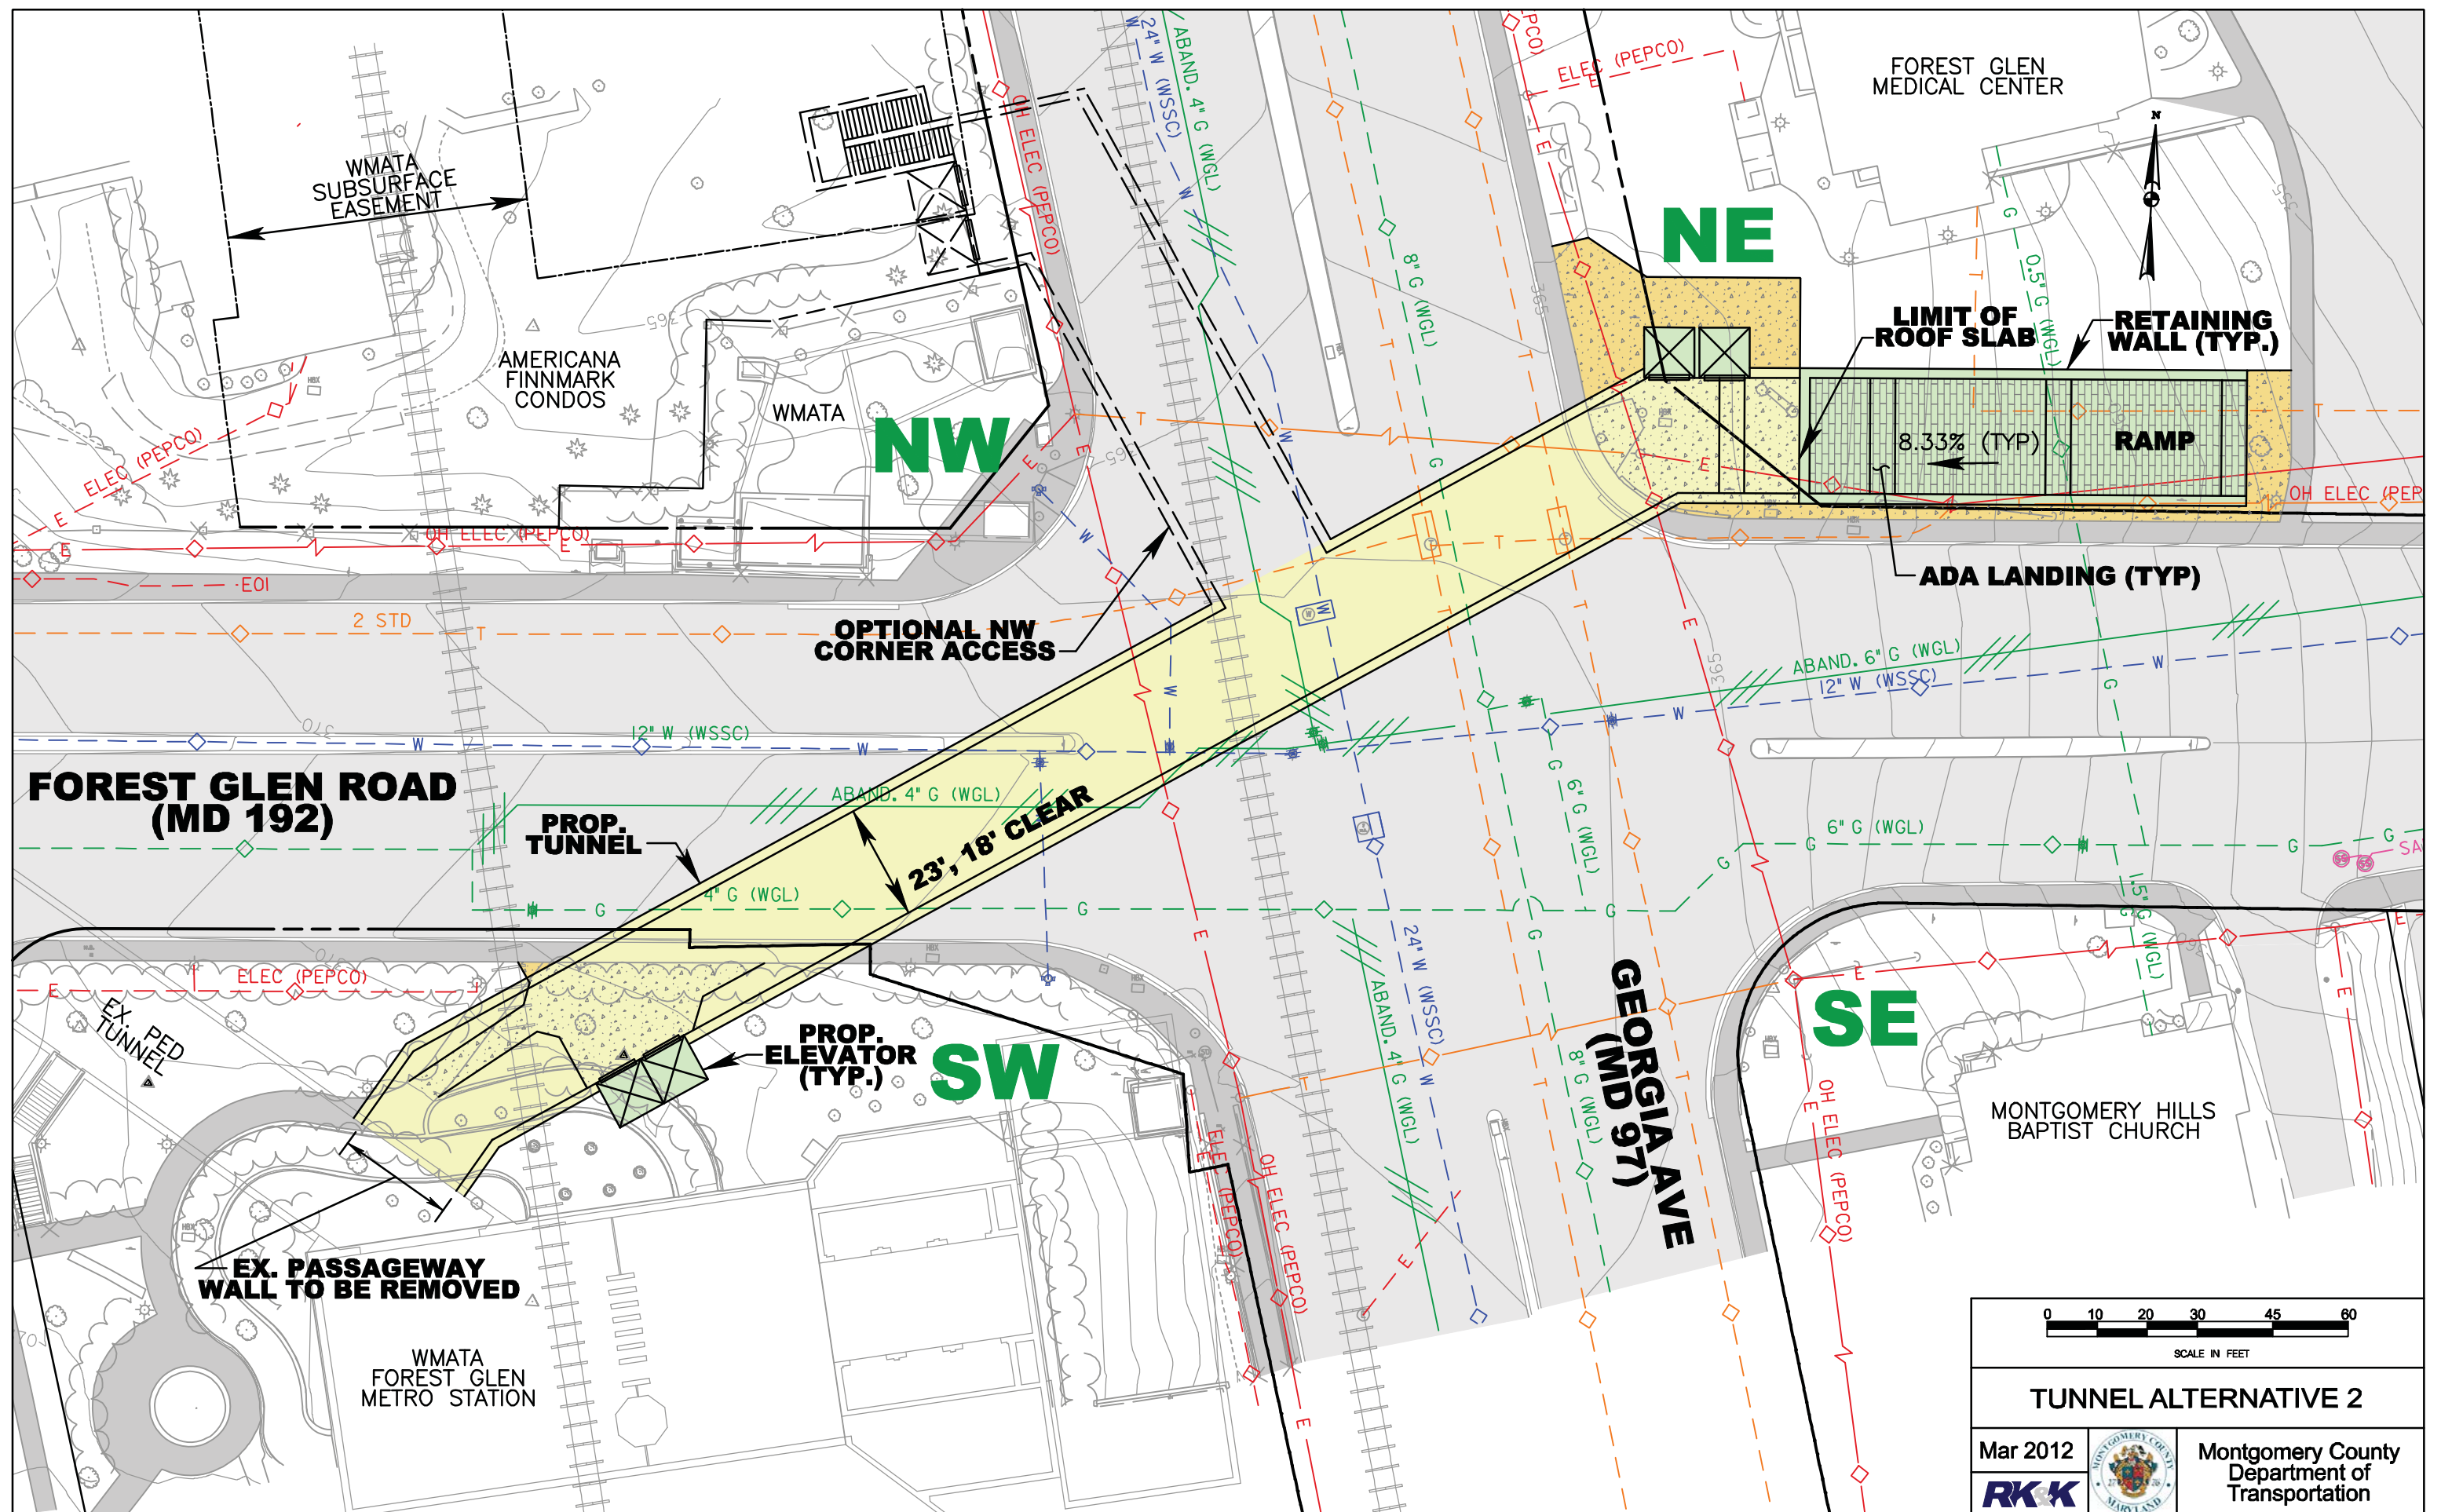




Looking the portal of Tunnel Alternative 2 at the NE quadrant from the east end of the portal



Looking the portal of Tunnel Alternative 2 at the NE quadrant from the NW quadrant

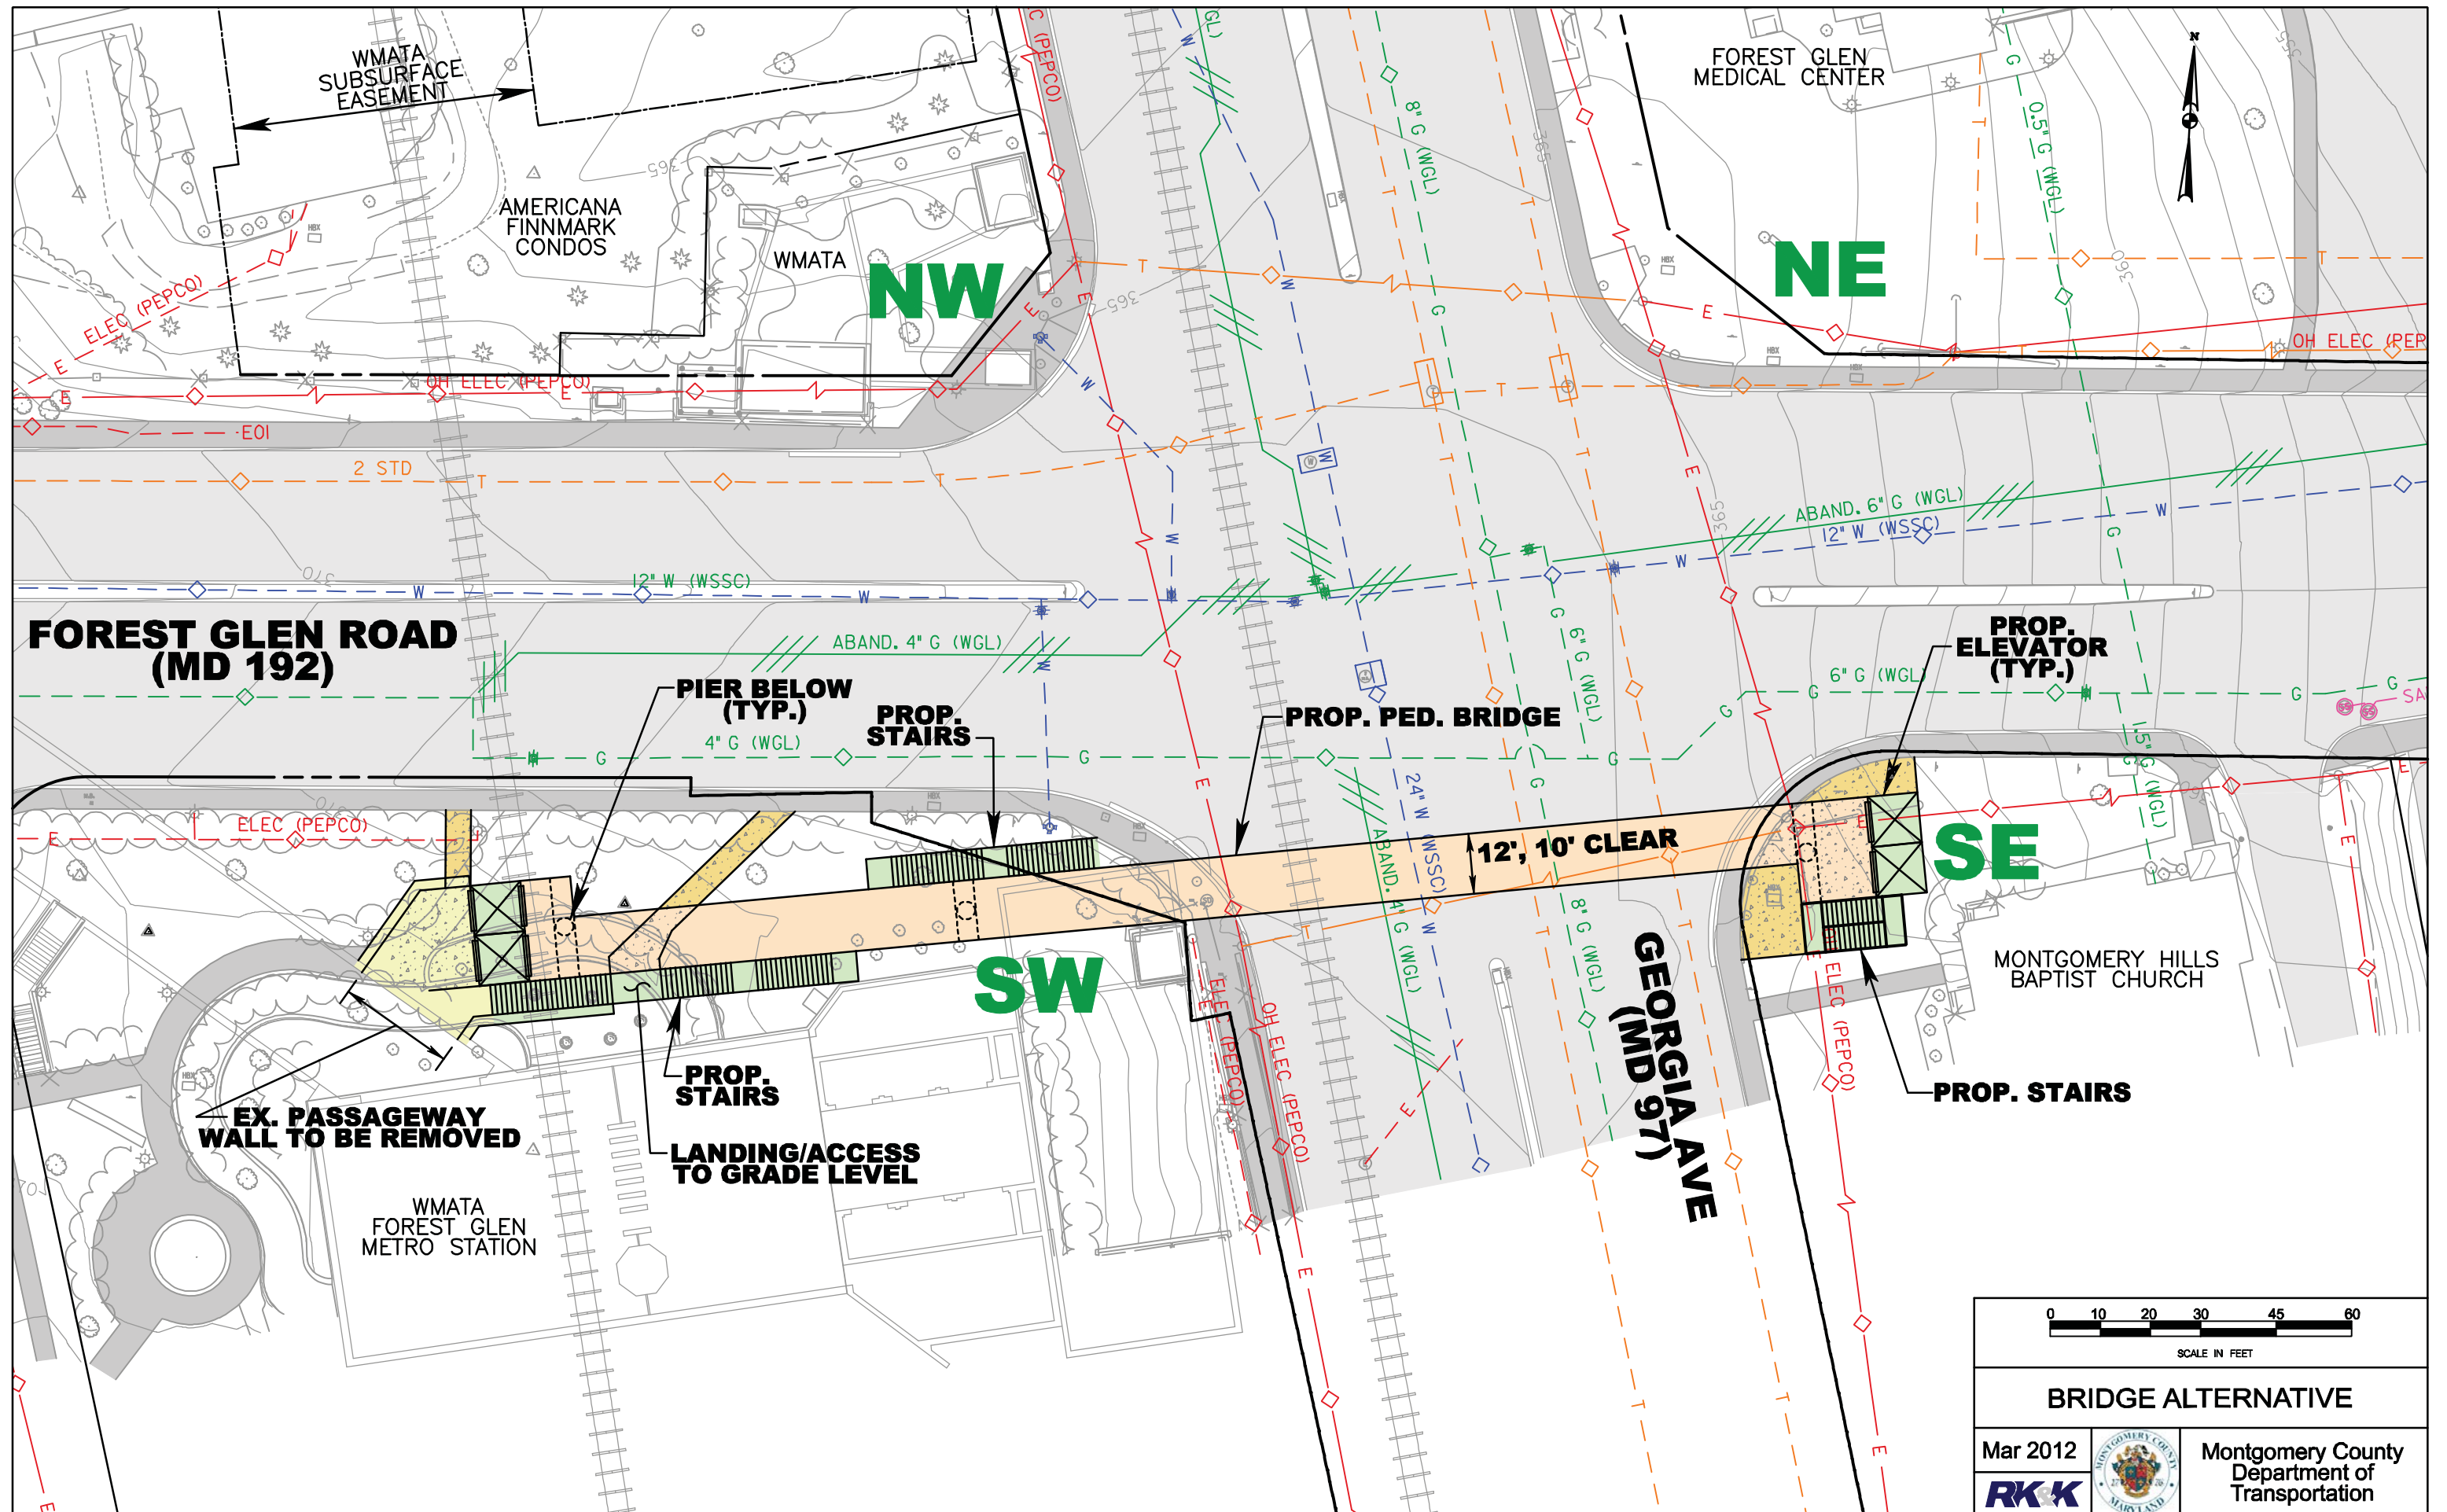



Looking Bridge Alternative 1 from the NE quadrant

	Tunnel Alternative 1 (SE Quadrant to Metro)	Tunnel Alternative 2 (NE Quadrant to Metro)	Bridge Alternative 1 (SE Quadrant to Metro)
Length (Ft)	• 303	• 324	• 270
Width (Ft)	• 23 (18 Ft Clear)	• 23 (18 Ft Clear)	• 12 (10 Ft Clear)
Estimated Pedestrian Usage (Crossing MD 97/ Day)	• 759	• 461	• 683
Average Travel Time Savings (Sec/Pedestrian)	• 119	• 103	• 57
Construction Duration	• 39 months	• 39 months	• 15 months
Maintenance of Traffic	• Partial Night Time Work (18 months) • Overnight Lane Closures to 2-3 Lanes on Georgia Ave and Forest Glen Rd	• Partial Night Time Work (18 months) • Overnight Lane Closures to 2-3 Lanes on Georgia Ave and Forest Glen Rd	• Partial Night Time Work (3 months) • Overnight Lane Closures to 2-3 Lanes on Georgia Ave. • Single overnight complete closure of Georgia Ave
Properties Impacted	• 1 Property, 2200 Square Feet	• 1 Property, 4100 Square Feet	• 1 Property, 1500 Square Feet
Utility Impacts	• High - Underground, overhead, and traffic signal	• High - Underground, overhead, and traffic signal	• Moderate - Overhead and traffic signal
Construction Cost	• \$11.5M	• \$12.1M	• \$5.8M