



MCDOT NEWS

News from the Montgomery County Department of Transportation, Division of Highway Services

FOX HILLS WEST NEIGHBORHOOD PAVEMENT PRESERVATION PROJECT

Project to Begin Soon, Work to Include Micro Resurfacing

INTRODUCTION

This newsletter is to inform you of the upcoming pavement preservation of the Fox Hills West subdivision and to describe the process. This system preservation project employs long term strategies to preserve and enhance the physical and operating conditions of the roadway system as it exists and will make the system serviceable for many years.

BACKGROUND

The Montgomery County Department of Transportation's (MCDOT) Division of Highway Services (DHS) maintains over 5,108 lane miles of streets using various methods of routine maintenance, pavement restoration and repaving depending on the level of pavement deterioration present. Most notably, crack seals, asphalt patching, seal-coat resurfacing, and hot mix asphalt overlays are chief among pavement restoration options.

MCDOT is now developing County-wide maintenance schedules based on a countywide pavement assessment which uses both an objective rating system and budgetary parameters.

SCOPE OF PROJECT

MCDOT recently completed a countywide pavement assessment of more than 5,108 lane miles of residential pavement including the streets in the Fox Hills West area. The study notes that the relative condition of the pavements in the Fox Hills West area warrants inclusion in the Residential Resurfacing Program. Further, the study finds that the overall condition of the pavement within the area warrant a systematic approach of full-depth permanent patching followed by a complete application of micro surfacing; which is a thin-coat pavement treatment designed to seal and preserve the pavement. This combined treatment will restore struc-

tural capacity of the pavement and provide a thin seal-coat that will preserve the integrity of the pavement while enhancing its aesthetic value as well.

PROJECT WORK PLAN

Typically, the roadways are prepared before micro surfacing. This work, excluding the micro surfacing application, has already been completed in your neighborhood. Below is the overall scope of the project:


1. Conduct survey — Identify areas of roadway in need of repair. You may notice paint markings that outline areas for pavement replacement, such as those shown in the picture below.

2. Full Depth Patching – The MCDOT pavement evaluation has determined that, prior to resurfacing, full depth asphalt patching of the pavement or other repairs may be necessary at selected locations. Full depth patching restores the pavement's structural integrity and capacity to support vehicle loads.



Typical patching paint markings

3. Utility Adjustments - In most cases when resurfacing with micro, sewer and storm drain manholes, water valves and gas valves, and other underground

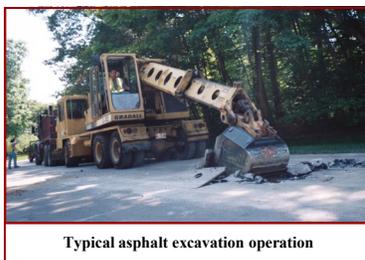

Typical asphalt excavation operation

utility access covers do not require adjustment to the finished grade of the material. However, any low utility covers may be raised to the existing level of the road surface.

4. Crack Sealing - An additional step may be necessary to seal large cracks that may not require full depth patching. A flexible filler material is injected into the cracks and sealed with a special tool.

5. Replace lane markings— Lane markings will be replaced within a week or two where they existed prior to resurfacing.

PAVEMENT PRESERVATION USING MICRO RESURFACING

The final step in the pavement preservation process is the application of the micro surfacing material. It is a cold applied liquid material containing a light sand aggregate that preserves pavement deemed to be in good condition. The material is uniformly machine applied (see photo below) and allowed to cure for several hours before opening to traffic. Additionally, the Residential Road Preservation treatment enhances the existing pavement, fills cracks and small voids, and extends the life and serviceability of the pavement.

The micro surfacing material will cover the entire road surface. This will provide for a uniform appearance and surface texture. A final sweeping, if needed, will remove any loose



Micro surfacing application

grit.

Although some cracks may reappear after about a year, the underlying crack seals prevent water from penetrating through the roadway.

SCHEDULE

Resurfacing is scheduled to begin in late August 2012, and will take 3 to 4 weeks to complete. Weather and operational requirements may affect the schedule.

All work will be scheduled between the hours of 7 am and 5 pm.

IMPACTS

Continuous traffic will be maintained at all times, although alternating one-way traffic patterns may be used periodically. However, minor traffic delays may be experienced as flaggers manually direct traffic safely through the construction zone. This project will necessitate temporary lane closures. Access to homes will be available at all times, however minor delays may be experienced as workers restrict traffic from driving on the freshly applied material. Traffic may be restricted from driving on the micro surfacing material until it is fully cured, usually for 3-4 hours. Driving on the freshly applied material will damage the material and may soil your vehicle and track onto your driveway. Orange traffic cones will be placed in the restricted lane.

Street repair, preparation and resurfacing work is generally characterized by some noise and dust. However, MCDOT will do its best to keep the site in good housekeeping order.

Thank you for your cooperation and patience as we work to improve the Fox Hills West subdivision for residents and users.



MONTGOMERY COUNTY, MARYLAND
 DEPARTMENT OF TRANSPORTATION
 DIVISION OF HIGHWAY SERVICES
 100 EDISON PARK DRIVE, 4TH FLOOR, GAITHERSBURG, MD 20878
 (240) 777-6000 www.montgomerycountymd.gov/MCDOT

KEEPING MONTGOMERY MOVING
 MCDOT NEWS No. 2012.68

NOTICE OF THE FOX HILLS WEST PAVEMENT PRESERVATION PROJECT

SAFETY NOTICE

Please remember that while repair work is proceeding, construction vehicles will be moving around. Some materials may be stored in the area. Please use caution when walking or driving through the construction zone. Children may be attracted to the noise and machinery, so please keep them under supervision at all times, even after the work is completed for the day. Also, please follow the direction of flagger's and temporary signs and traffic control devices. We appreciate your patience and cooperation while we make these much needed improvements to the infrastructure.

CONTACTS

The resurfacing and repair work is managed by DHS personnel. Should you wish to contact us concerning the resurfacing and repair work in your community, please contact:

Project Manager: Martin P. Wurdeman 240-777-7649
Program Manager: Donald Noble 240-777-7601

Should your questions be of a more general nature, please contact Customer Service at 240-777-6000.

DHS Email: mcdot.highway@montgomerycountymd.gov
DHS Website: <http://www.montgomerycountymd.gov/hwytml.asp?url=/content/dot/highway/index.asp>

On the map, click on the **Gaithersburg West Service Area**, where information is available describing the pavement preservation process.

