


# MONTGOMERY COUNTY RACK INSTALLATION

## INSTALLATION INFORMATION

- Pedestrian and ADA thoroughfare should be considered in rack placement.
- Bicycle racks cannot block entrances or exits to buildings.
- Spacing requirements are about 7'L x 4'W per rack and a stable concrete or asphalt surface is needed.
- A specialized security bolt should be utilized to prevent tampering and provide stability.

## INSTALLATION INFORMATION

Below is a graphic depicting the Association of Pedestrian and Bicycle Professionals (ABPB) recommended dimensions for bicycle rack areas.

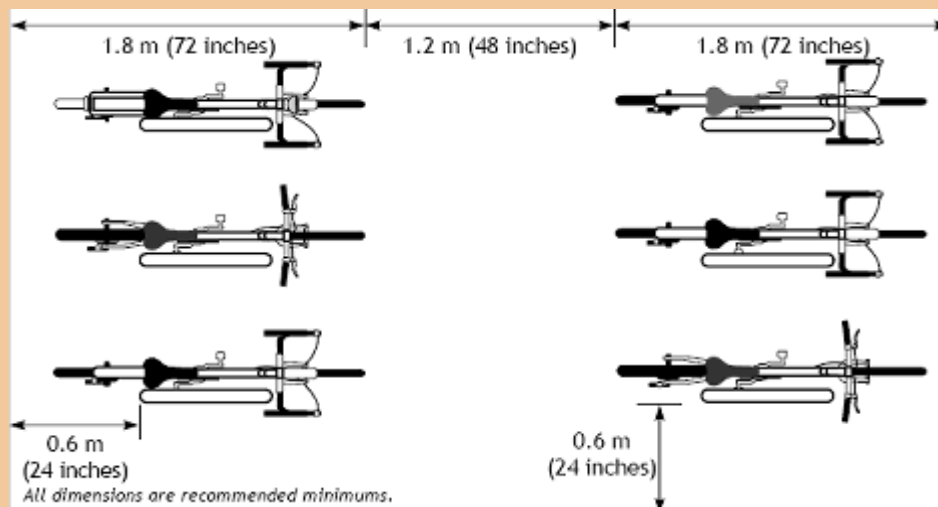

## FOR MORE INFORMATION

### CONTACT

[Bike@montgomerycountymd.gov](mailto:Bike@montgomerycountymd.gov)

### VISIT

- [www.bikemontgomery.com](http://www.bikemontgomery.com)
- <http://www.fhwa.dot.gov/publications/research/safety/pedbike/05085/chapt17.cfm>