

NOTES:
 - POLE MOUNTED FIXTURES ARE MOUNTED ON A 15 FT POLE ATOP A 24 INCH HIGH CONCRETE BASE.
 - FOOTCANDLE LEVEL CALCULATED AT GRADE USING INITIAL LUMEN VALUES.

THIS SITE IS LOCATED IN A REGION WHERE LIGHTING IS REGULATED BY LOCAL ORDINANCES

LUMINAIRE LOCATION SUMMARY			LUMINAIRE LOCATION SUMMARY		
LUM NO	LABEL	MTG. HT.	LUM NO	LABEL	MTG. HT.
1	SA	17	57	W2	10
2	SA	17	58	W2	10
3	SA	17	59	W2	10
4	SA	17	60	W2	10
5	SA	17	61	W2	10
6	SA	17	62	W2	10
7	SA5	17	63	W2	10
8	SA5	17	64	W2	10
9	SA5	17	65	W2	10
10	SA5	17	66	W2	10
11	SA6	17	67	W2	10
12	SA6	17	68	W2	10
13	SA7	17	69	W2	10
14	SA7	17	70	W2	10
15	SA7	17	71	W3	8
16	SA7	17	72	W3	8
17	SA7	17	73	W4	18.85
18	SA7	17	74	W4	18.85
19	SA7	17	75	W4	18.85
20	SB	17	76	W4	18.85
21	SBS	17	77	W4	18.85
22	SC1	15	78	W4	18.85
23	SC1	15	79	W4	18.85
24	SC1	15	80	W4	18.85
25	SC1	15	81	W4	18.85
26	SC1	15	82	W4	18.85
27	SC1	15	83	W4	18.85
28	SC1	15	84	W4	18.85
29	SC1	15	85	W4	18.85
30	SC1	15	86	W4	18.85
31	SC1	15	87	W4	18.85
32	SC1	15	88	W4	18.85
33	SC1	15	89	W4	18.85
34	SC1	15	90	W4	18.85
35	SC1	15	91	W4	18.85
36	SC1	15	92	W4	18.85
37	SC1	15	93	W4	18.85
38	SC1	15	94	W4	18.85
39	SC1	15	95	W4	18.85
40	SC1	15	96	W4	18.85
41	SC1	15	97	W4	18.85
42	SC1	15	98	W4	18.85
43	SC1	15	99	W4	18.85
44	SC1	15	100	W4	18.85
45	SC1	15	101	W4	18.85
46	W1	9	102	W4	18.85
47	W1	9	103	W4	18.85
48	W1	9	104	W4	18.85
49	W1	9	105	W4	18.85
50	W1A	10	106	W4	18.85
51	W1A	10	107	W4	18.85
52	W1EM	10	108	W5	18.85
53	W1EM	9	109	W5	18.85
54	W1EM	9	110	W5	18.85
55	W2	10	111	W5	18.85
56	W2	10	112	W5	18.85
			113	W5	18.85

CALCULATION SUMMARY					
LABEL	AVG	MAX	MIN	AVGMIN	MAXMIN
CANOPY	24.78	30	13	1.91	2.31
PAVED AREA	5.50	18.7	0.2	27.50	93.50
PROPERTY LINE	0.19	0.5	0.0	N.A.	N.A.
UNDEFINED	1.12	21.3	0.0	N.A.	N.A.

LUMINAIRE SCHEDULE										
SYMBOL	QTY	LABEL	ARRANGEMENT	LUMENS	LLF	BUG RATING	WATTS/LUMINAIRE	TOTAL WATTS	MANUFACTURE	CATALOG LOGIC
[Symbol]	6	SA	Single	12325	1.000	B2-U0-G4	90.12	540.72	Lithonia Lighting	DSXO LED P5 50K 70CRI TSM MVOLT FAO XX
[Symbol]	4	SA5	Single	8964	1.000	B0-U0-G2	90.12	360.48	Lithonia Lighting	DSXO LED P5 50K 70CRI BLC3 MVOLT FAO XX
[Symbol]	2	SA6	Single	9047	1.000	B1-U0-G2	90.12	180.24	Lithonia Lighting	DSXO LED P5 50K 70CRI LCCO MVOLT FAO XX
[Symbol]	7	SA7	Single	9047	1.000	B1-U0-G2	90.12	630.84	Lithonia Lighting	DSXO LED P5 50K 70CRI RCCO MVOLT FAO XX
[Symbol]	1	SB	Single	12509	1.000	B2-U0-G4	90.12	90.12	Lithonia Lighting	DSXO LED P5 50K 70CRI T4M MVOLT FAO XX
[Symbol]	1	SBS	Single	9258	1.000	B0-U0-G3	90.12	90.12	Lithonia Lighting	DSXO LED P5 50K 70CRI BLC4 MVOLT FAO XX
[Symbol]	24	SC1	Single	7165	1.000	B3-U0-G1	42.5378	1020.907	Lithonia Lighting	RCNY LED ALO2 50K 80CRI SYMC MVOLT BZL DWHXX (Setting 2) WHITE
[Symbol]	4	W1	SINGLE	4124	1.000	B1-U0-G1	29.4252	117.701	Lithonia Lighting	ARC2 LED P4 40K MVOLT FAO-XXXX
[Symbol]	2	W1A	SINGLE	1587	1.000	B0-U0-G1	10.6112	21.222	Lithonia Lighting	ARC2 LED P1 40K MVOLT FAO-XXXX (SETTING 4)
[Symbol]	3	W1EM	SINGLE	4124	1.000	B1-U0-G1	29.4252	88.276	Lithonia Lighting	ARC2 LED P4 40K MVOLT EBWC FAO-XXXX (EMERGENCY)
[Symbol]	16	W2	SINGLE	3008	1.000	B1-U0-G0	45	720	FC/SSL Lighting	FCSSQ412W-LUNV-940-3030L-BKE-D50U50-LD
[Symbol]	2	W3	SINGLE	407	1.000	N.A.	9.9	19.8	Lightalms	CAMSD8-CW
[Symbol]	35	W4	Single	2583	1.000	B1-U2-G1	19.422	679.77	SSL	MC-4-4K-CR80-120
[Symbol]	6	W5	Single	543	1.000	B0-U1-G0	4.626	27.756	SSL	MC-1-4K-CR80-120

DISCLAIMER

ANY SITE PLAN(S), FLOOR PLAN(S), RENDERING(S), LIGHTING LAYOUT(S) AND PHOTOMETRIC PLAN(S) INCLUDING BUT NOT LIMITED TO ANY PROJECT(S) CREATED/PRODUCED BY RED LEONARD ASSOCIATES INC., ARE ONLY INTENDED FOR ILLUSTRATION AND QUOTING PURPOSES ONLY. RED LEONARD ASSOCIATES HAS THE RIGHT TO USE THIRD PARTY LASERS, SCANNERS, AND CAMERAS BUT ACTUAL PROJECT CONDITIONS, DIMENSIONS, AND ACCURACY OF MEASUREMENTS MAY DIFFER FROM THESE OR ANY PARAMETERS. RED LEONARD ASSOCIATES INC. ASSUMES NO LIABILITY FOR WHAT IS CREATED/PRODUCED IN THESE RECREATIONS. THIS INCLUDES BUT IS NOT LIMITED TO THE USE OF, INSTALLATION OF AND/OR INTEGRITY OF EXISTING BUILDING(S), SURROUNDING AREA FOR PRODUCT(S) SUCH AS EXISTING POLES(S), ANCHOR BOLTS(S), BASE(S), ARCHITECTURAL AND SIGNAGE STRUCTURE(S), LANDSCAPING PLAN(S), LIGHTING PLAN(S), FIXTURE SELECTION(S) AND PLACEMENT, MATERIAL(S), COLOR ACCURACY, TEXTURE(S), AND ANYTHING ATTRIBUTED TO PHOTO REALISM THAT IS CREATED. FURTHERMORE, RED LEONARD ASSOCIATES INC. DOES NOT ASSUME LIABILITY WHATSOEVER FOR ANY PURCHASES MADE BY CLIENT BEFORE, DURING, OR AT THE CONCLUSION OF THE PUBLISHED WORK. THE CUSTOMER, ITS RELATIVE AFFILIATES, AS WELL AS ANY OTHER PERSON(S) IN VIEWING OF THIS PRODUCT IS RESPONSIBLE FOR VERIFYING COMPLIANCE WITH ANY BUT NOT LIMITED TO ALL CODES, PERMITS, RESTRICTIONS, INSTRUCTIONS, PURCHASES, AND INSTALLATIONS OF OBJECTS VIEWED WITHIN THIS DOCUMENT(S) OR PROJECT(S). SYMBOLS ARE NOT DRAWN TO SCALE. SIZE IS FOR CLARITY PURPOSES ONLY. SIZES AND DIMENSIONS ARE APPROXIMATE. ACTUAL MEASUREMENTS MAY VARY. DRAWINGS ARE NOT INTENDED FOR ENGINEERING OR CONSTRUCTION USE. THIS DOCUMENT, ANY RED LEONARD DRAWING(S) OR PROJECT(S) IS NOT TO BE USED AND/OR INTENDED FOR ENGINEERING OR CONSTRUCTION PURPOSES, BUT FOR ILLUSTRATIVE PURPOSES ONLY. ANY LOCATIONS OF EMERGENCY LIGHTING SHOWN WERE PROVIDED BY OTHERS. RED LEONARD ASSOCIATES IS NOT RESPONSIBLE FOR INSUFFICIENT LIGHTING DURING AN EMERGENCY EVENT. ANY USE OF THIS DOCUMENTATION AND/OR OTHER ARTICLES PRODUCED BY RED LEONARD WITHOUT WRITTEN AUTHORIZATION FROM JAVINE J. LEONARD IS STRICTLY PROHIBITED.

REV.	BY	DATE	DESCRIPTION
R1	TAS	10/22/25	REDUCED LIGHTING AT PROPERTY LINE AND CANOPY
R2	TAS	11/14/25	RELOCATED LIGHT POLES FOR EXISTING STORM SEWER
R3	TAS	2/4/26	UPDATED SITE PLAN
R4	TAS	2/5/26	REVISED FIXTURE TYPES
R5	TAS	3/20/26	REDUCED LIGHTING AT PROPERTY LINE
R6	TAS	3/23/25	REMOVED LIGHT POLE AT TANK AREA.

SCALE: 1" = 30'
 DWG SIZE: D

LAYOUT BY: TAS
 DATE: 9/19/25


PROJECT NAME:
DASH IN #1880
GAITHERSBURG, MD
 DRAWING NUMBER:
RL-10617-S1-R6



QTY	LABEL	DESCRIPTION
6	SA	DSXO LED P5 50K 70CRI T3M MVOLT FAO XX
4	SA5	DSXO LED P5 50K 70CRI BLC3 MVOLT FAO XX
2	SA6	DSXO LED P5 50K 70CRI LCCO MVOLT FAO XX
7	SA7	DSXO LED P5 50K 70CRI RCCO MVOLT FAO XX
1	SB	DSXO LED P5 50K 70CRI T4M MVOLT FAO XX
1	SB5	DSXO LED P5 50K 70CRI BLC4 MVOLT FAO XX

ADDITIONAL FIXTURE INFO

D-Series Size 0 LED Area Luminaire



Specifications

- EPA: 0.44 ft² (0.041)
- Length: 26.1" (663 mm)
- Width: 14.0" (355 mm)
- Height H1: 2.26" (57 mm)
- Height H2: 7.42" (188 mm)
- Weight: 23 lbs (10.4 kg)

Introduction

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications, with typical energy savings of 70% and expected service life of over 100,000 hours.

Ordering Information

EXAMPLE: DSXO LED P6 40K 70CRI T3M MVOLT SVA NLAIRD PIRHN DBDX

Series	LEDs	Color Temperature	Color Rendering Index	Beam Spread	Beam Angle	Beam Diameter	Beam Spread	Beam Angle	Beam Diameter
DSXO LED	P5	5000K	90CRI	120°	120°	14.0"	120°	120°	14.0"
	P6	5000K	90CRI	120°	120°	14.0"	120°	120°	14.0"
	P7	5000K	90CRI	120°	120°	14.0"	120°	120°	14.0"

Ordering Information

EXAMPLE: DSXO LED P6 40K 70CRI T3M MVOLT SVA NLAIRD PIRHN DBDX

Series	LEDs	Color Temperature	Color Rendering Index	Beam Spread	Beam Angle	Beam Diameter	Beam Spread	Beam Angle	Beam Diameter
DSXO LED	P5	5000K	90CRI	120°	120°	14.0"	120°	120°	14.0"
	P6	5000K	90CRI	120°	120°	14.0"	120°	120°	14.0"
	P7	5000K	90CRI	120°	120°	14.0"	120°	120°	14.0"

Shield Accessories

- External Glare Shield (EGSR)
- House Side Shield (HS)


Ordering Information

Accessories

- External Glare Shield (EGSR)
- House Side Shield (HS)

Drilling

HANDHOLE ORIENTATION



Tenon Mounting Splitter

Mounting Type	Splitter	Splitter	Splitter	Splitter	Splitter	Splitter
DSXO with P5	1.14	1.14	1.14	1.14	1.14	1.14
DSXO with P6	1.14	1.14	1.14	1.14	1.14	1.14
DSXO with P7	1.14	1.14	1.14	1.14	1.14	1.14

DSXO Area Luminaire - EPA

Mounting Type	Beam Spread	Beam Angle	Beam Diameter	Beam Spread	Beam Angle	Beam Diameter
DSXO with P5	120°	120°	14.0"	120°	120°	14.0"
DSXO with P6	120°	120°	14.0"	120°	120°	14.0"
DSXO with P7	120°	120°	14.0"	120°	120°	14.0"


Ordering Information

Accessories

- External Glare Shield (EGSR)
- House Side Shield (HS)

Drilling

HANDHOLE ORIENTATION



Tenon Mounting Splitter

Mounting Type	Splitter	Splitter	Splitter	Splitter	Splitter	Splitter
DSXO with P5	1.14	1.14	1.14	1.14	1.14	1.14
DSXO with P6	1.14	1.14	1.14	1.14	1.14	1.14
DSXO with P7	1.14	1.14	1.14	1.14	1.14	1.14

DSXO Area Luminaire - EPA

Mounting Type	Beam Spread	Beam Angle	Beam Diameter	Beam Spread	Beam Angle	Beam Diameter
DSXO with P5	120°	120°	14.0"	120°	120°	14.0"
DSXO with P6	120°	120°	14.0"	120°	120°	14.0"
DSXO with P7	120°	120°	14.0"	120°	120°	14.0"

QTY	LABEL	DESCRIPTION
24	SC1	RCNY LED ALQ2 50K 80CRI SYMC MVOLT BZL DWHXD (SETTING 2) WHITE

ADDITIONAL FIXTURE INFO

RCNY LED Recessed Canopy Luminaire



Specifications

- Width: 11.5"
- Height: 5.9"
- Length: 11.5"
- Weight: 14lbs

Introduction

The modern styling of the RCNY provides superior illumination while blending into the canopy space seamlessly. The RCNY is unique in that as a recessed canopy it can be installed in both 12" and 16" canopy decks. Features such as Adjustable Lumen Output and forward throw distribution option make the RCNY one of the most versatile gas station canopies in the market. With up to 159 LPW the RCNY LED delivers up to 80% in energy savings when replacing metal halide luminaires. With over 100,000 hour life expectancy (12+ years of 24/7 continuous operation), the RCNY LED luminaire provides significant maintenance savings over traditional luminaires.

Ordering Information

EXAMPLE: RCNY LED ALQ2 50K 70CRI SYMC MVOLT BZS DWHXD


Series	LEDs	Color Temperature	Color Rendering Index	Beam Spread	Beam Angle	Beam Diameter	Beam Spread	Beam Angle	Beam Diameter
RCNY LED	ALQ1	5000K	80CRI	120°	120°	11.5"	120°	120°	11.5"
	ALQ2	5000K	80CRI	120°	120°	11.5"	120°	120°	11.5"
	ALQ3	5000K	80CRI	120°	120°	11.5"	120°	120°	11.5"

Accessories

- External Glare Shield (EGSR)
- House Side Shield (HS)

Photometric Diagrams

Full photometric data report available within 2 weeks from request. Contact Sales@Lithonia.com

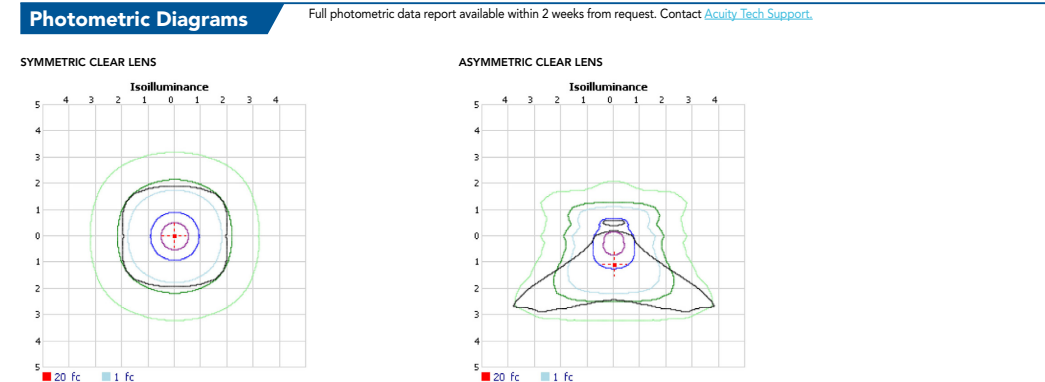

Symmetric Clear Lens

Asymmetric Clear Lens

Performance Data

Symmetric Clear Lens, 70CRI

Performance Package	System Watt	Lumens	LPW	U	U ₀	U ₁₀	U ₂₀	U ₃₀	U ₄₀	U ₅₀	U ₆₀	U ₇₀	U ₈₀	U ₉₀	U ₁₀₀
P1	11W	8,986	817	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81
P2	16W	13,479	842	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84
P3	21W	17,972	856	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86
P4	26W	22,465	865	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
P5	31W	26,958	871	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88


Asymmetric Clear Lens, 70CRI

Performance Package	System Watt	Lumens	LPW	U	U ₀	U ₁₀	U ₂₀	U ₃₀	U ₄₀	U ₅₀	U ₆₀	U ₇₀	U ₈₀	U ₉₀	U ₁₀₀
P1	11W	8,986	817	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81
P2	16W	13,479	842	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84
P3	21W	17,972	856	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86
P4	26W	22,465	865	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
P5	31W	26,958	871	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88	0.88

QTY	LABEL	DESCRIPTION
4	W1	ARC2 LED P4 40K MVOLT FAO-XXXX
2	W1A	ARC2 LED P1 40K MVOLT FAO XXXX (SETTING 4)
3	W1EM	ARC2 LED P4 40K MVOLT E8WC FAO-XXXX (EMERGENCY)

ADDITIONAL FIXTURE INFO

ARC2 LED Architectural Wall Luminaire



Specifications

- Depth (D1): 9.25"
- Depth (D2): 7.5"
- Height: 5"
- Width: 14"
- Weight: 11 lbs (without options)

Introduction

The Lithonia Lighting ARC2 LED wall-mounted luminaires provide both architectural styling and visually comfortable illumination while providing the high energy savings and low initial costs for quick financial payback. ARC2 delivers up to 6,500 lumens with a soft, non-pixelated light source, creating a visually comfortable environment. It offers integrated emergency battery backup options, including an 8W cold temperature option, making it suitable for pedestrian scale applications in any environment.

ARC LED Family Overview

Luminaire	Standard, 0% C	Cold, 10% C	P1	P2	P3	P4	P5
ARC1 LED	4W	—	1,500	2,000	1,000	—	—
ARC2 LED	4W	8W	1,500	2,000	1,000	6,000	6,500

Ordering Information

EXAMPLE: ARC2 LED P2 40K MVOLT FE DBDX

Series	Package	Color Temperature	Voltage	Options	Finish	
ARC2 LED	P1	120V/277V	30K	5000K	W1EM1	6060
	P2	120V/277V	40K	5000K	5000K	6060
	P3	120V/277V	50K	5000K	5000K	6060
	P4	120V/277V	50K	5000K	5000K	6060
	P5	120V/277V	50K	5000K	5000K	6060

Accessories

- External Glare Shield (EGSR)
- House Side Shield (HS)

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by lighting fixtures.

Performance Package	System Watt	Lumens	LPW	U	U ₀	U ₁₀	U ₂₀	U ₃₀	U ₄₀	U ₅₀	U ₆₀	U ₇₀	U ₈₀	U ₉₀	U ₁₀₀
P1	11W	1,500	142	0	0	1	1,500	100	0	0	1	1,500	100	0	1
P2	16W	2,250	140	0	0	1	2,250	140	0	0	1	2,250	140	0	1
P3	21W	3,000	143	0	0	1	3,000	143	0	0	1	3,000	143	0	1
P4	26W	3,750	144	0	0	1	3,750	144	0	0	1	3,750	144	0	1
P5	31W	4,500	145	0	0	1	4,500	145	0	0	1	4,500	145	0	1

Electrical Load

Performance Package	System Watt	Current (A)	Current (A)	Current (A)	Current (A)	Current (A)
P1	11W	0.06	0.055	0.06	0.06	0.06
P2	16W	0.14	0.081	0.075	0.084	0.093
P3	21W	0.20	0.117	0.108	0.121	0.130
P4	26W	0.28	0.162	0.148	0.168	0.182
P5	31W	0.34	0.222	0.209	0.232	0.248

Lumen Output in Emergency Mode (4000K, 80 CRI)

Performance Package	System Watt	Lumens	LPW	U	U ₀	U ₁₀	U ₂₀	U ₃₀	U ₄₀	U ₅₀	U ₆₀	U ₇₀	U ₈₀	U ₉₀	U ₁₀₀
P1	11W	1,500	142	0	0	1	1,500	100	0	0	1	1,500	100	0	1
P2	16W	2,250	140	0	0	1	2,250	140	0	0	1	2,250	140	0	1
P3	21W	3,000	143	0	0	1	3,000	143	0	0	1	3,000	143	0	1
P4	26W	3,750	144	0	0	1	3,750	144	0	0	1	3,750	144	0	1
P5	31W	4,500	145	0	0	1	4,500	145	0	0	1	4,500	145	0	1

Lumen Ambient Temperature (LAT) Multipliers


Ambient	Lumen Multiplier
0°C	1.27
10°C	0.97
20°C	0.97
25°C	1.01
30°C	0.97
40°C	0.97

Projected LED Lumen Maintenance

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	>=0.96	>=0.91	>=0.88

Photometric Diagrams


To see complete photometric reports or download .ies files for this product, visit the Lithonia Lighting ARC2 LED homepage. Refer to associated with IESNA LM-79 and LM-80 standards.

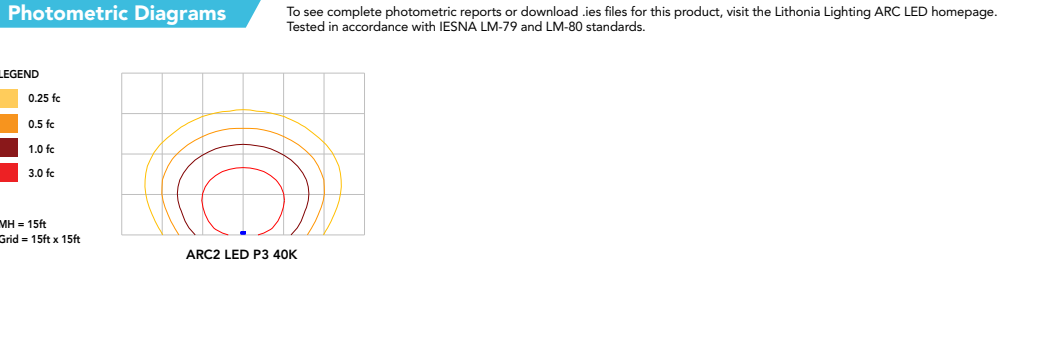

QTY	LABEL	DESCRIPTION
16	W2	FCCSQ412W-UNV-940-3030L-BKE-D60U50-LD

ADDITIONAL FIXTURE INFO

FCCSQ400 Up/Down or Up, Standard Drivers without Battery Backup



Specifications

- Height (H): 10.95"
- Width (W): 6.54"
- Depth (D): 3.75"

Introduction

The FCCSQ400 Up/Down or Up, Standard Drivers without Battery Backup is a high-quality, energy-efficient luminaire designed for use in a variety of applications. It features a die-cast aluminum housing and a high-quality LED light source. The luminaire is available in a variety of finishes and is suitable for use in both indoor and outdoor environments.

Ordering Information

EXAMPLE: FCCSQ400 UNV-927 50K BKE DT15 ET

Model	Length	Mounting	Voltage	Color	Lumens	Finish	Downlight Optics	Uplight Optics	Dimming	Options	Battery
FCCSQ410W	10.95" height	(1 Integral Driver Only)	120V/277V	50K	4000	6060	025	025	Narrow Flood (2%)	U15	U15
FCCSQ412W	12.95" height	(1 Integral Driver Only)	120V/277V	50K	6000	6060	025	025	Narrow Flood (2%)	U25	U25
FCCSQ414W	14.95" height	(1 Integral Driver Only)	120V/277V	50K	8000	6060	025	025	Narrow Flood (2%)	U35	U35
FCCSQ416W	16.95" height	(1 Integral Driver Only)	120V/277V	50K	10000	6060	025	025	Narrow Flood (2%)	U45	U45
FCCSQ418W	18.95" height	(1 Integral Driver Only)	120V/277V	50K	12000	6060	0				

QTY	LABEL	DESCRIPTION
35	W4	MC-4-4K-CR180-120
6	W5	MC-1-4K-CR180-120



MINI COVELINE



Type: _____ Approved: _____
 Fixture: _____
 Project: _____

The MINI COVELINE is a very slim profile luminaire, less than 1 inch tall, that's perfect for tight spaces that require a maximum range of light output. MINI COVELINE is available in 1 ft or 4 ft lengths with 27K, 3K, 30K or 4K color temperatures. The housing is constructed of extruded aluminum with hood and caps and is rated for dry and damp locations. It's Chicago Code Compliant meeting the standards for application use in Chicago, IL, and features Plug N' Play connector for easy installation. Standard bracket has 120° rotation capability for adjusting beam direction. Flicker free dimmable to 0% full brightness with ELV trailing edge dimming.



SPECIFICATIONS	
PHYSICAL	
beam spread (θ), (cut)	60° 120°
LEDs per foot	14 per foot
length/dimensions (LxWxH)	12" x 1.28" x .95" 48" x 1.28" x .95"
weight	1 foot (75 lbs) / 4 foot (3 lbs)
housing	extruded aluminum housing with hooded end caps
lens	standard, etched polycarbonate
mounting	standard, surface mount bracket with 135° rotation
ingress protection	IP44 rated for damp and dry interior locations
fixture connections	daisy chain with male and female, 3-PIN, plug-n-play connectors
PERFORMANCE	
color temperature	2700K 3000K 3500K 4000K
lumen output (at ea.)	532 Lms / ft 541 Lms / ft 553 Lms / ft 564 Lms / ft
lumen maintenance	> 70,000 hours / L70
temperature	operating: -4°F to 104°F (-20°C to 40°C) start up: -4°F to 104°F (-20°C to 40°C) storage: -40°F to 176°F (-40°C to 60°C)
color consistency	2 SDCM / standard: CRI ≥ 80 (87 typical) optional: CRI ≥ 90 CRI
junction temperature	60°C @ T _a 25°C
warranty	5 year limited warranty (refer to website for details)
ELECTRICAL	
input voltage	Universal 120-277V AC
power supply	integral Class II, electronic high-power factor 98% @ 120V
certification	ETL, I-ETL, listed, CCC, FCC Part 24 - J40 Compliant
standards	UL 1598 / CSA Std C22.2 No. 250.0, IESLM-70-LM-80, FCC Part 15
power consumption	1 ft @ full power (4.2W) 4 ft @ full power (16.8W)
dimming interface	dimmable to 0%, (ELV) electronic low-voltage trailing edge, synchronized w/soft shut-off, 0-10V Dim Module (one per run)

Due to continuous development and improvements, specifications are subject to change without notice. Solid State Luminaires reserves the right to change its test details or specifications without notice. Product use conforms agreement to Solid State Luminaires terms and conditions.

US Commercial Lighting Manufacturer Since 1982

© Solid State Luminaires 3609 swenson ave • st. charles il • 60174 | solidstateluminaires.com | 800.900.1730 JO Rev. 06/2019

Ordering Information

PART NUMBERS					
MC	MODEL	LENGTH	CCT	CRI	OPTICS
MC	MINI COVELINE	1 12 in. (305 mm)	27K 2700K	CR80 80 CRI	60 60° beam
		4 48 in. (1219 mm)	3K 3000K	CR90 90 CRI	120 120° beam
			30K 3000K		
			4K 4000K		

Each fixture includes Surface Mount Bracket with 135° rotation

Mounting Options (indicate the quantity needed for each item.)
 _____ TR81 Mounting Track 12 inch
 _____ TR84 Mounting Track 48 inch

Cable Accessories (indicate the quantity needed for each item.)
REQUIRED: Starter Cable (SCS) and Terminator Cap (TCAP) for every run. **Maximum Run Length:** 80 feet @ 120V AC and 120 feet @ 277V AC
 _____ SC6 6 ft. Starter Connection Cord _____ EC06 6 ft. Extension Cord
 _____ TCAP Terminator Cap _____ EC12 12 ft. Extension Cord
 _____ EC24 24 ft. Extension Cord _____ EC36 36 ft. Extension Cord
 _____ EC48 48 ft. Extension Cord

Control Components (indicate the quantity needed for each item.)
 model _____
 MC-10VLEDIM 0-10V ELV Dim Module w/rotator Rated Enclosure (1 module per run)

Due to continuous development and improvements, specifications are subject to change without notice. Solid State Luminaires reserves the right to change its test details or specifications without notice. Product use conforms agreement to Solid State Luminaires terms and conditions.

US Commercial Lighting Manufacturer Since 1982

© Solid State Luminaires 3609 swenson ave • st. charles il • 60174 | solidstateluminaires.com | 800.900.1730 JO Rev. 06/2019



1340 Kemper Meadow Dr. Forest Park, OH 45240
 513-674-9500 | redleonard.com

ANY SITE PLAN(S), FLOOR PLAN(S), RENDERING(S), LIGHTING LAYOUT(S) AND PHOTOMETRIC PLAN(S) INCLUDING BUT NOT LIMITED TO ANY PROJECT(S) CREATED/PRODUCED BY RED LEONARD ASSOCIATES INC., ARE ONLY INTENDED FOR ILLUSTRATION AND QUOTING PURPOSES ONLY. RED LEONARD ASSOCIATES HAS THE RIGHT TO USE THIRD PARTY LASERS, SCANNERS, AND CAMERAS BUT ACTUAL PROJECT CONDITIONS, DIMENSIONS, AND ACCURACY OF MEASUREMENTS MAY DIFFER FROM THESE OR ANY PARAMETERS. RED LEONARD ASSOCIATES INC. ASSUMES NO LIABILITY FOR WHAT IS CREATED/PRODUCED IN THESE RECREATIONS. THIS INCLUDES BUT IS NOT LIMITED TO THE USE OF, INSTALLATION OF AND/OR INTEGRITY OF EXISTING BUILDING(S), SURROUNDING AREA FOR PRODUCT(S) SUCH AS EXISTING POLE(S), ANCHOR BOLT(S), BASE(S), ARCHITECTURAL AND SIGNAGE STRUCTURE(S), LANDSCAPING PLAN(S), LIGHTING PLAN(S), FIXTURE SELECTION(S) AND PLACEMENT, MATERIAL(S), COLOR ACCURACY, TEXTURE(S), AND ANYTHING ATTRIBUTED TO PHOTO REALISM THAT IS CREATED. FURTHERMORE, RED LEONARD ASSOCIATES INC. DOES NOT ASSUME LIABILITY WHATSOEVER FOR ANY PURCHASES MADE BY CLIENT BEFORE, DURING, OR AT THE CONCLUSION OF THE PUBLISHED WORK. THE CUSTOMER, ITS RELATIVE AFFILIATES, AS WELL AS ANY OTHER PERSON(S) IN VIEWING OF THIS PRODUCT IS RESPONSIBLE FOR VERIFYING COMPLIANCE WITH ANY BUT NOT LIMITED TO ALL CODES, PERMITS, RESTRICTIONS, INSTRUCTIONS, PURCHASES, AND INSTALLATIONS OF OBJECTS VIEWED WITHIN THIS DOCUMENT(S) OR PROJECT(S). SYMBOLS ARE NOT DRAWN TO SCALE. SIZE IS FOR CLARITY PURPOSES ONLY. SIZES AND DIMENSIONS ARE APPROXIMATE. ACTUAL MEASUREMENTS MAY VARY. DRAWINGS ARE NOT INTENDED FOR ENGINEERING OR CONSTRUCTION USE. THIS DOCUMENT, ANY RED LEONARD DRAWING(S), OR PROJECT(S) IS NOT TO BE USED AND/OR INTENDED FOR ENGINEERING OR CONSTRUCTION PURPOSES, BUT FOR ILLUSTRATIVE PURPOSES ONLY. ANY USE OF THIS DOCUMENTATION AND/OR OTHER ARTICLES PRODUCED BY RED LEONARD WITHOUT WRITTEN AUTHORIZATION FROM JAYME J. LEONARD IS STRICTLY PROHIBITED.

PROJECT NAME:
DASH IN #1880
GAITHERSBURG, MD
 DRAWING NUMBER:
RL-10617-S1-R6



AREA	
CANOPY	
WALL MOUNTED	
WALL MOUNTED	
WALL MOUNTED	
COVELINE	

