

**GENERAL NOTES: DEMOLITION**

- GC SHALL NOTIFY THE ARCHITECT OF ANY CONCEALED CONDITIONS UNCOVERED DURING DEMOLITION THAT IMPEDES THE EXECUTION OF THE DESIGN AS INDICATED ON THE DOCUMENTS OR POSES ANY HEALTH AND/OR LIFE-SAFETY HAZARDS.
- GC SHALL MINIMIZE DAMAGE TO FINISHES ADJACENT TO DEMOLITION AREAS, GC SHALL BE RESPONSIBLE FOR RESTORING ALL FINISHES AFFECTED BY THEIR WORK.
- REFER TO MECHANICAL, ELECTRICAL, AND PLUMBING COMPONENTS FOR DEMOLITION OF SUCH MATERIALS, EQUIPMENT & SYSTEMS.
- DIMENSIONS ARE BASED ON FIELD SURVEYS BY ARCHITECT. ANY DISCREPANCIES IN DIMENSIONS THAT CONFLICT WITH DESIGN AS DRAWN MUST BE BROUGHT TO THE ATTENTION OF THE ARCHITECT IMMEDIATELY.
- NOTIFY LANDLORD/OWNER IN WRITING 72 HOURS PRIOR TO COMMENCING WORK ON ANY PROJECT PHASE OR PERFORMING ANY WORK THAT WILL IN ANY WAY IMPACT THE LANDLORD/OWNER (SUCH AS CONSTRUCTION OF TEMPORARY BARRICADES, TEMPORARY UTILITY SHUT DOWNS). DO NOT PROCEED WITH SUCH WORK IF THE LANDLORD/OWNER DOES NOT GRANT PERMISSION.
- PERFORM ALL WORK IN ACCORDANCE WITH ALL APPLICABLE CODES AND PERMITS, NOT LIMITED TO THOSE REFERENCED HEREIN.
- PRIOR TO PROCEEDING WITH DEMOLITION GC TO REVIEW HAZARDOUS MATERIALS TESTING REPORT. GC MUST NOTIFY LANDLORD/OWNER AND ARCHITECT WHEN HAZARDOUS MATERIALS NOT INCLUDED IN THE REPORT ARE DISCOVERED PRIOR TO PROCEEDING WITH REMOVAL ACCORDING TO FEDERAL, STATE AND LOCAL LAWS.
- VERIFY EXTENT OF EXISTING CONSTRUCTION IN FIELD, IMMEDIATELY NOTIFY ARCHITECT OF ANY DISCREPANCIES.
- GC IS RESPONSIBLE FOR PROTECTION OF THE EXPOSED BUILDING, INTERIOR MATERIALS AND FINISHES SUBJECT TO WEATHER, WATER AND MOISTURE, EXTREME TEMPERATURES DURING THE TERM OF THE CONSTRUCTION PERIOD. REFER TO SPECIFICATION SECTION 015000 TEMPORARY FACILITIES AND CONTROLS FOR SPECIFICS. GC IS RESPONSIBLE FOR THE MEANS OF A PROTECTION PLAN.
- PRIOR TO STRUCTURAL MODIFICATIONS INDICATED HEREIN OR OTHERWISE, GC IS RESPONSIBLE FOR PROVIDING ENGINEERED MEANS FOR TEMPORARY SHORING.

**GENERAL NOTES: DEMOLITION**

**GENERAL NOTES: EXTERIOR ELEVATIONS**

**NEW CONSTRUCTION:**


- ALL DIMENSIONS REFER TO FINISHED SURFACES, U.N.O.
- ALL DIMENSIONS AT DOORS AND WINDOWS REFER TO NOMINAL OPENINGS, U.N.O.
- SEE A-\_\_\_ FOR WINDOW SCHEDULE AND ELEVATIONS.
- REFER TO ELECTRICAL DRAWINGS FOR BUILDING MOUNTED AND POLE MOUNTED SITE LIGHTING HEIGHTS, U.N.O.
- FOR DOOR TAGS REFER TO FLOOR PLANS.

**EXISTING BUILDING:**

- ALL DIMENSIONS REFER TO FINISHED SURFACES, U.N.O.
- ALL DIMENSIONS AT DOORS AND WINDOWS REFER TO NOMINAL OPENINGS, U.N.O.
- SEE A-\_\_\_ FOR WINDOW SCHEDULE AND ELEVATIONS.
- ALL EXISTING WINDOWS AND DOORS ARE TO BE REPLACED WITH NEW, SEE WINDOW SCHEDULE FOR SIZE, CONFIGURATION AND HARDWARE SPECIFICATIONS.
- GC SHALL VERIFY EXISTING OPENINGS AND FLOOR TO FLOOR HEIGHTS. REPORT VARIANCES FROM DOCUMENTS TO THE ARCHITECT.
- FOR DOOR TAGS REFER TO FLOOR PLANS.


**GENERAL NOTES: EXTERIOR ELEVATIONS**

KEYED NOTES	
E-1	REMOVE EXISTING SHINGLE ROOF DOWN TO SHEATHING INCL. GUTTERS/DOWNSPOUTS
E-2	PROVIDE NEW 30 YEAR WARRANTED FIBERGLASS 3 TAB SHINGLE ROOF
E-3	IDENTIFY AND REPLACE SHEATHING WHERE REQUIRED
E-4	PROVIDE NEW EXTERIOR FIBERGLASS OR STEEL INSULATED DOOR
E-5	REPLACE EXISTING WINDOWS W/ NEW THERMALLY BROKEN ENERGY STAR CERTIFIED WINDOWS WITH INSULATED GLAZING
E-7	PROVIDE NEW GUTTERS AND DOWNSPOUTS, TYP.
E-11	PROVIDE NEW COMPOSITE OR VINYL GUARDRAIL AND HANDRAIL (AT STAIRS). COORD. WITH OWNER FOR REQUIRED HEIGHT ABOVE AND BEYOND CODE REQUIREMENT
E-12	PROVIDE NEW 36"x60" CASEMENT WINDOW AT NEW ADDITION. WINDOW TO MATCH REPLACEMENT WINDOWS, BUT MEET NEW CONSTRUCTION INSTALLATION REQUIREMENTS
E-14	REMOVE EXISTING DORMER IN ITS ENTIRETY
E-16	REMOVE PORTION OF ROOF FRAMING. REFER TO STRUCTURAL
E-17	REMOVE EXISTING SKYLIGHT
E-18	REPLACE EXISTING SKYLIGHT. INSTALL FLASHING PER MANUFACTURER'S REQUIREMENTS
E-19	REMOVE SECTION OF WALL AND WINDOWS
E-20	PROVIDE NEW CANOPY OVER ENTRANCE DOOR
E-22	PROVIDE NEW ACQU UNIT. SEE MECHANICAL DRAWINGS
E-24	REMOVE WINDOW
E-25	REMOVE ACQU UNIT
E-26	REMOVE EXTERIOR DOOR

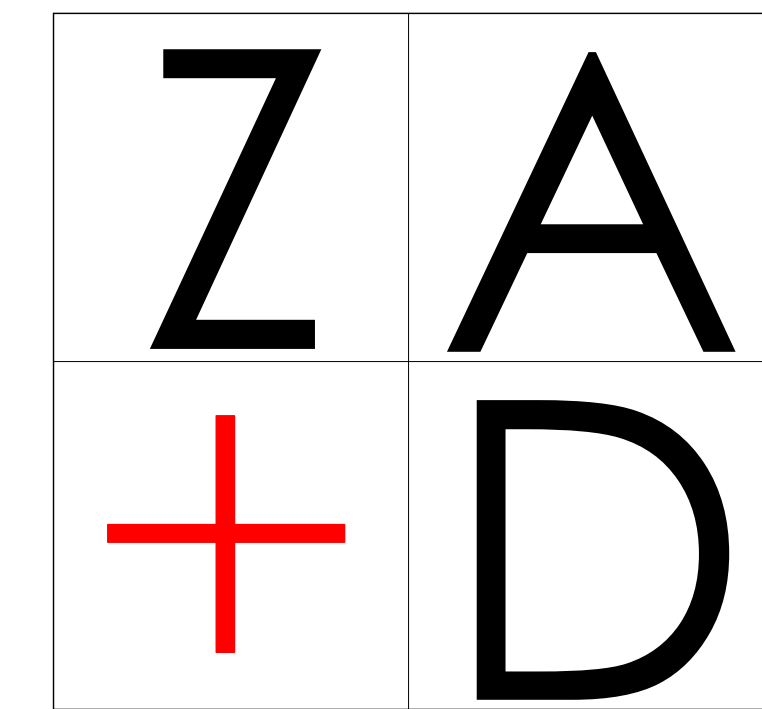

**ZA+D** design  
**ZA+D** interiors  
**ZA+D** passiv  
*Redefining the Building Potential*

PRINTS ISSUED		
NO.	DESCRIPTION	DATE
1	ISSUED	10/21/2020

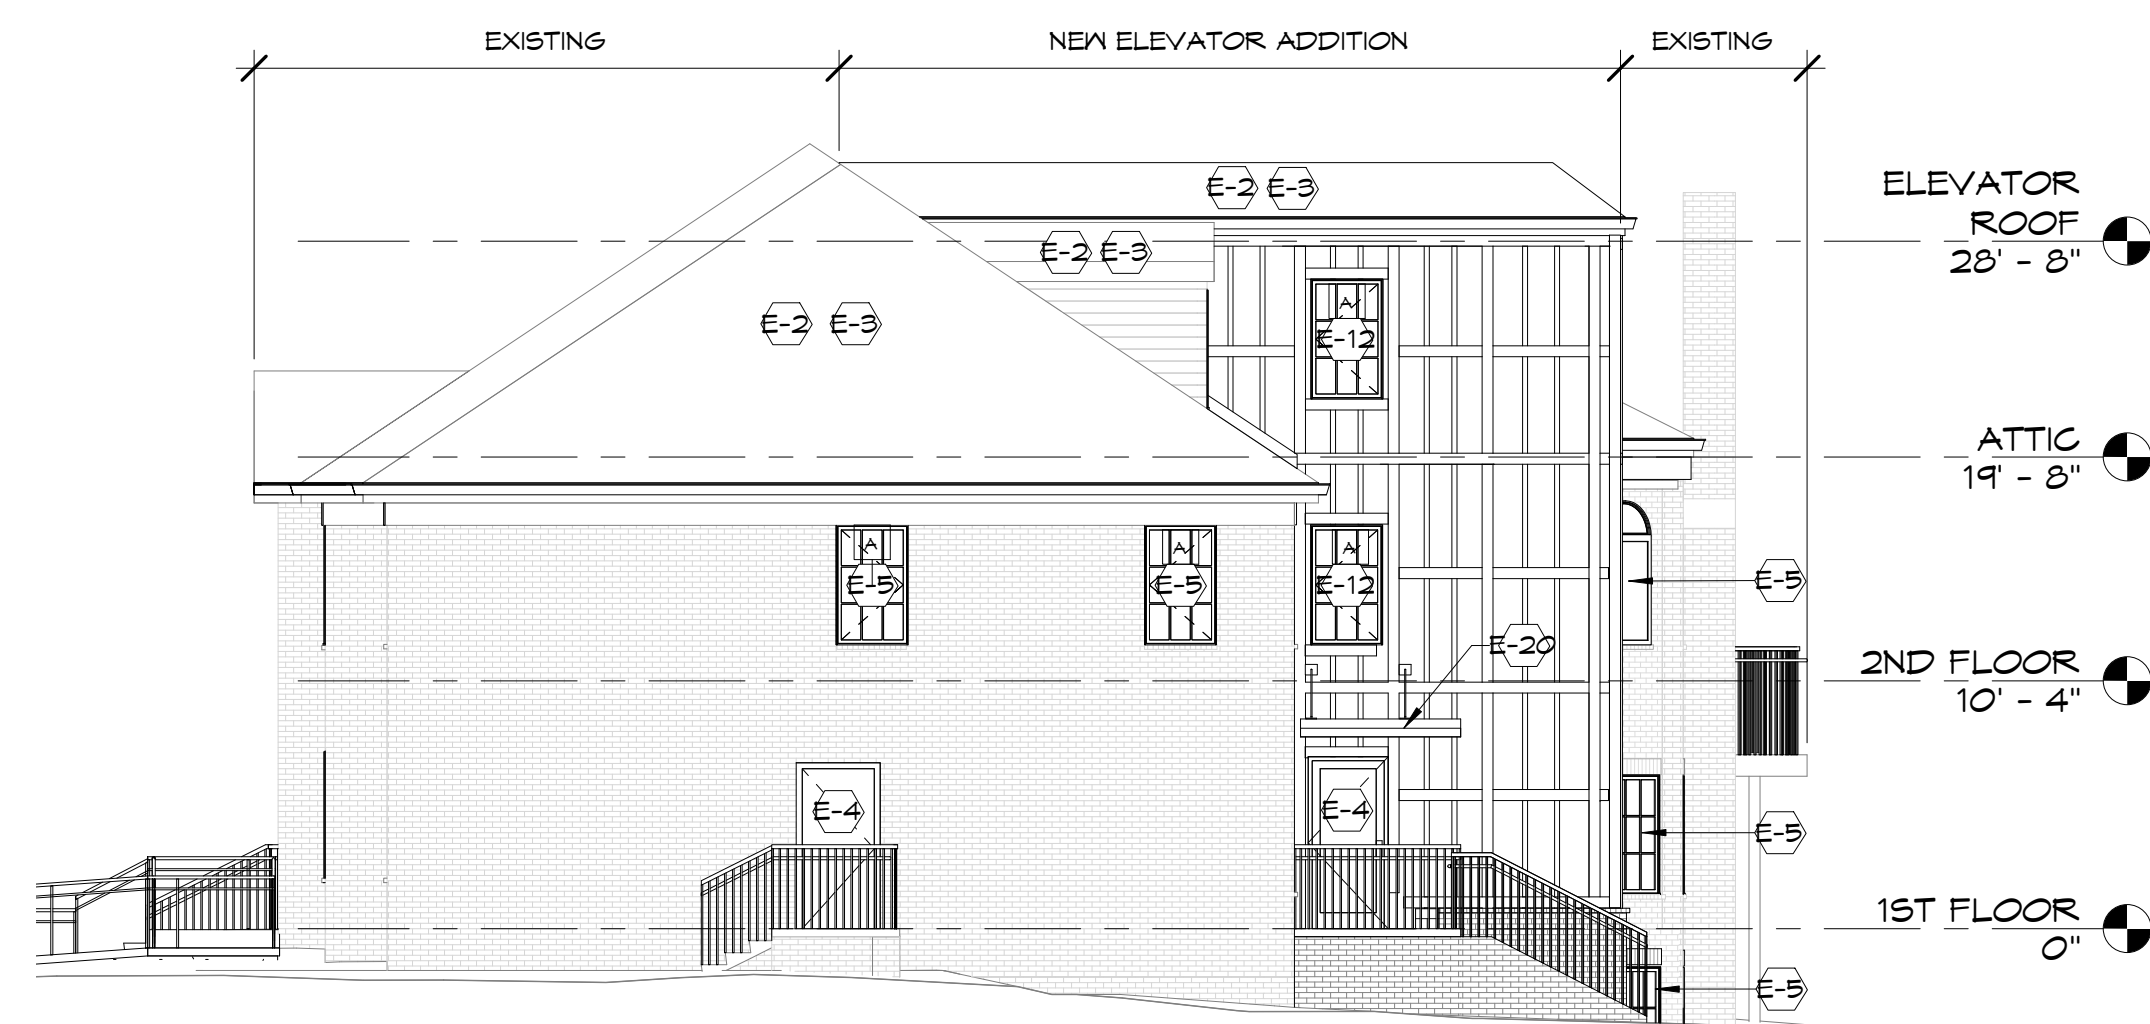

**2 WEST ELEVATION - NEW WORK**

A-302 SCALE: 1/8" = 1'-0"



**1 SOUTH ELEVATION - NEW WORK**


A-302 SCALE: 1/8" = 1'-0"

ALL DIMENSIONS SHALL BE VERIFIED IN THE FIELD BY THE CONTRACTOR. THE CONTRACTOR IS SOLELY RESPONSIBLE FOR COORDINATION OF ALL DIMENSIONS. ALL REQUIRED PERMITS SHALL BE ACQUIRED PRIOR TO COMMENCEMENT OF WORK. ARCHITECT HEREBY EXPRESSLY RESERVES HIS COMMON LAW COPYRIGHT AND OTHER PROPERTY RIGHTS IN THESE PLANS. THESE PLANS AND DRAWINGS ARE NOT TO BE REPRODUCED, CHANGED, OR COPIED IN ANY FORM OR MANNER WHATSOEVER, WITHOUT FIRST OBTAINING THE EXPRESS WRITTEN PERMISSION AND CONSENT OF ZAVOS ARCHITECTURE + DESIGN, LLC. NO WORK SHALL BE ASSIGNED TO ANY THIRD PARTY WITHOUT FIRST OBTAINING SAID WRITTEN PERMISSION AND CONSENT.

COPYRIGHT 2020 © ZAVOS ARCHITECTURE + DESIGN, LLC


QUALITY CONTROL REVIEW	
SD REVIEWER INITIALS	DATE: _____
DD REVIEWER INITIALS	DATE: _____
CD REVIEWER INITIALS	DATE: 02.17.20

EXHIBIT 35 (C)  
 OZAH CASE NO: CU 20-01

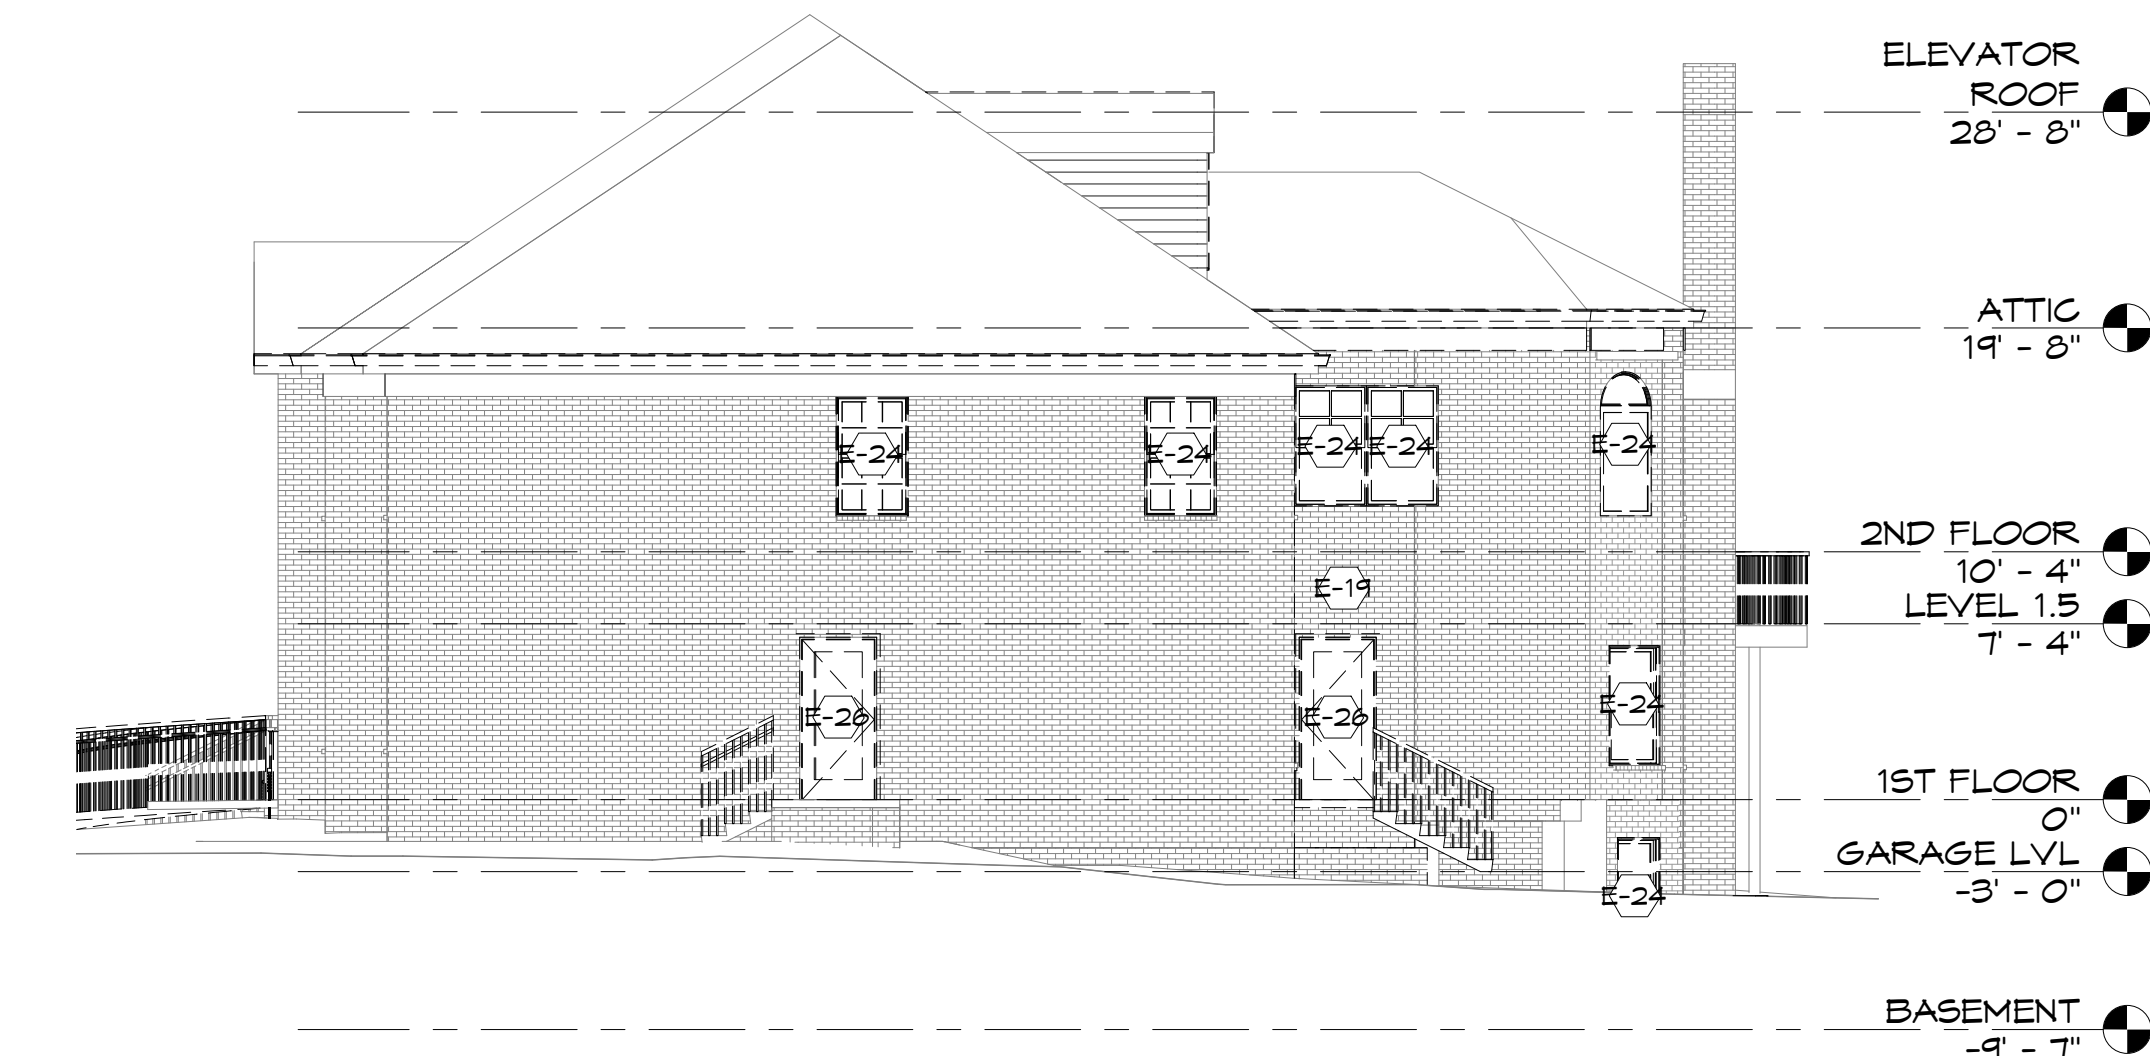

**4 WEST ELEVATION - DEMOLITION**

A-302 SCALE: 1/8" = 1'-0"

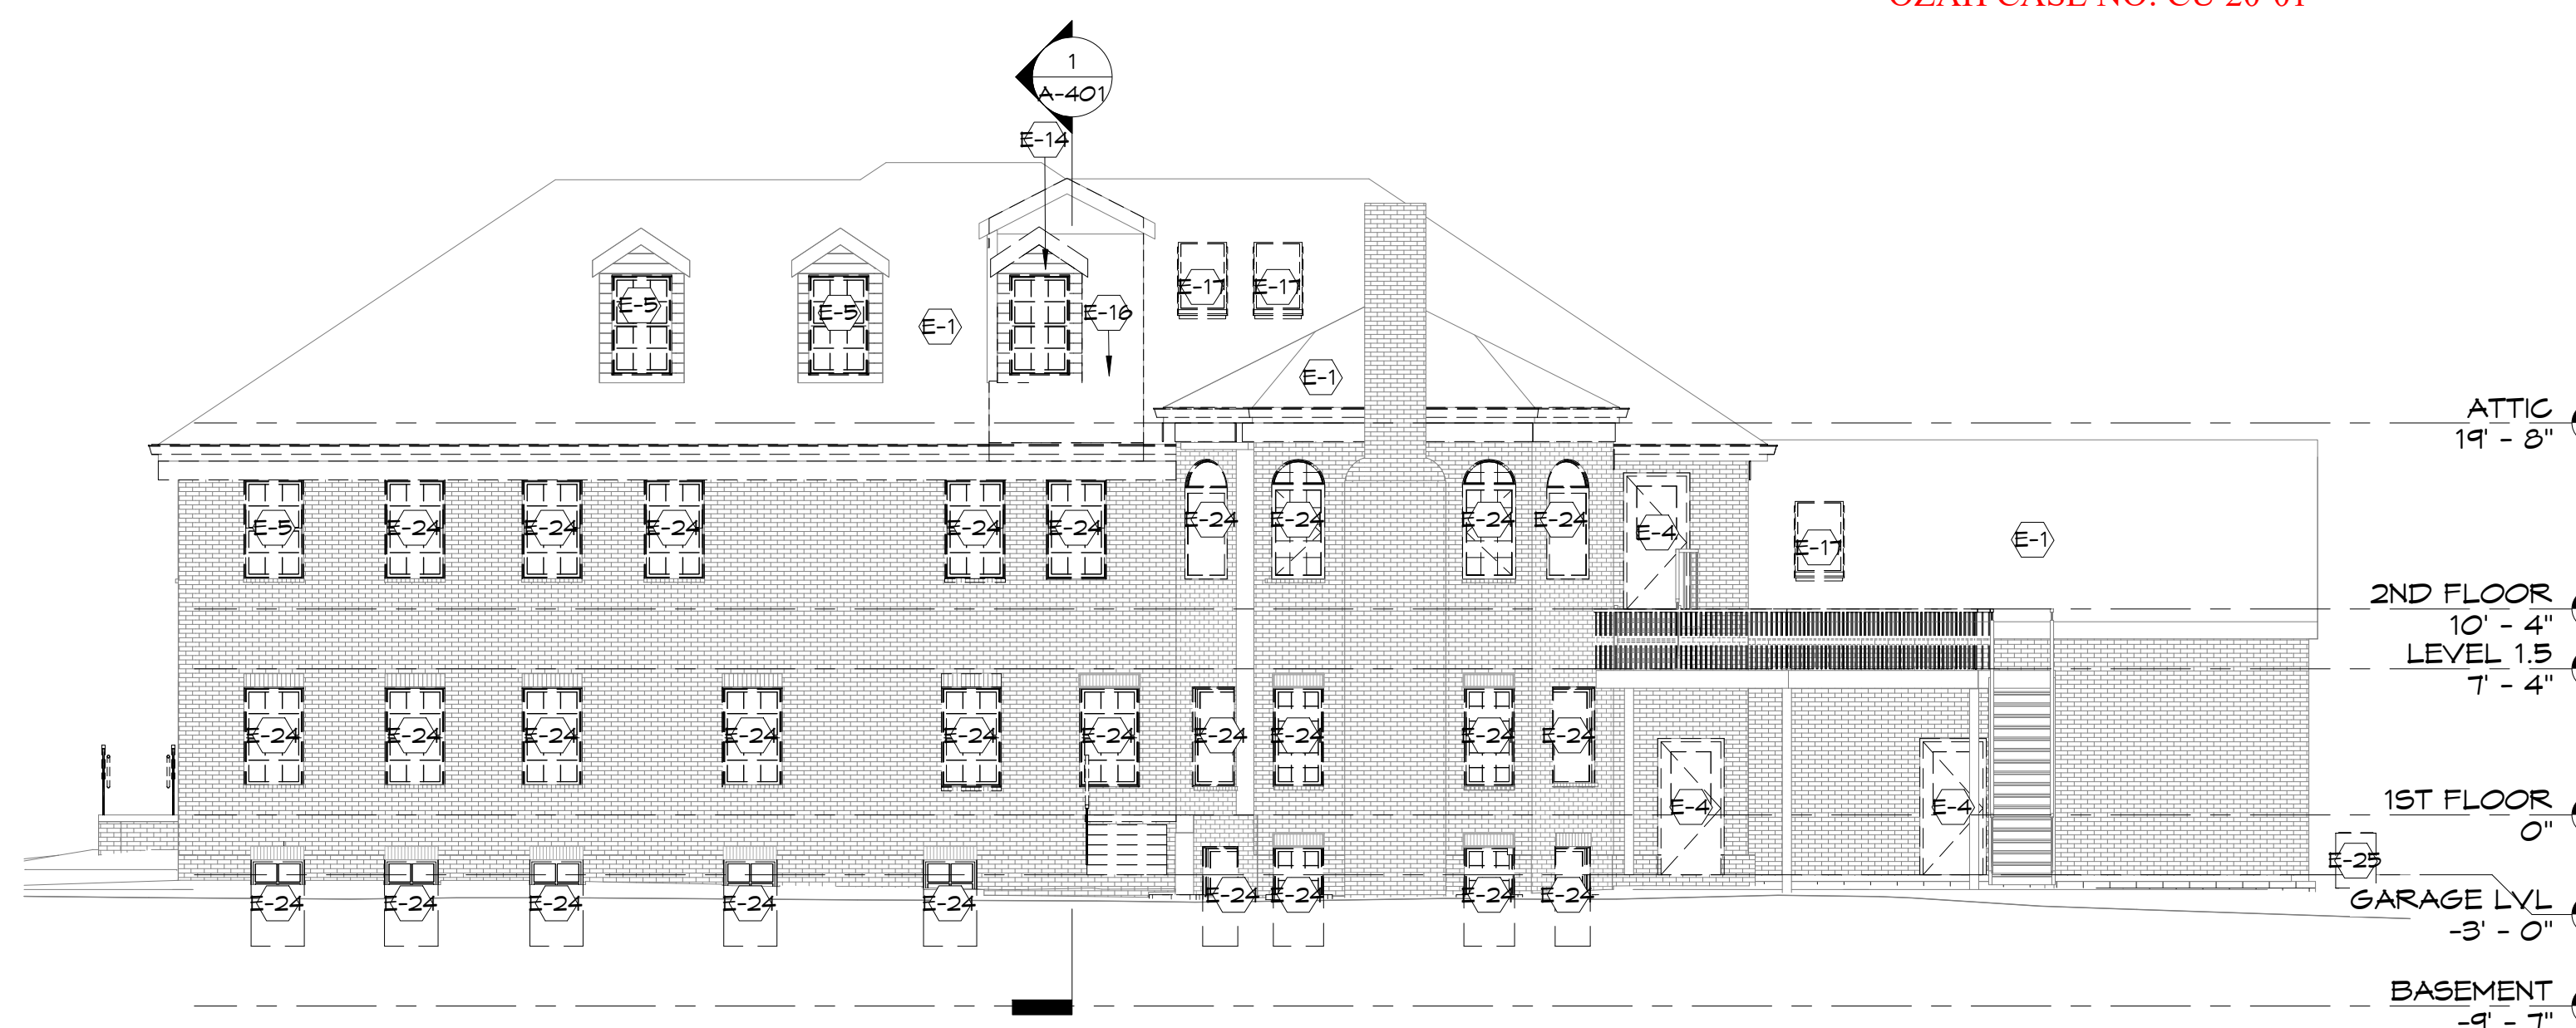

**3 SOUTH ELEVATION - DEMOLITION**

A-302 SCALE: 1/8" = 1'-0"

**WAY STATION**

PROJECT ADDRESS:  
 20629 Boland Farm Rd  
 Germantown MD, 20874

SHEET NAME:  
**EXTERIOR ELEVATIONS**

JOB NUMBER: 19207  
 DRAWING NUMBER:

**A-302**

323 WEST PATRICK ST.  
 FREDERICK, MD 21701  
 P.301.698.0020 F.301.698.0920  
[www.za-d.com](http://www.za-d.com)