

540^o™ Large Rescue Belay



IN ACCORDANCE WITH THE NATIONAL FIRE PROTECTION ASSOCIATION STANDARD ON FIRE SERVICE LIFE SAFETY ROPE AND SYSTEM COMPONENTS MEET ANSI/NFPA 1983 (2006 ED.)

User Information:

Key Features:

- Designed to limit the "relative worst-case" fall¹ of a rescue-sized load (e.g. 280 kg) to a peak force of approximately 15 kN or less, and with no more than about 1 m stopping distance
- Accepts 11.5-13 mm diameter Kernmantle rescue ropes; not for use with wire rope

- unique bi-directional rope loading and locking capability allows either end of the rope exiting the 540^o™ to be used as the load rope
- UL certified to meet ANSI/NFPA 1983-2006 ed. General Use, Auxiliary Equipment
- a built-in release lever eliminates the need for a separate release hitch
- self-locking with sudden falls

- only 624 grams
- very simple and easy to use

¹ For example, using a 1 m drop onto 3 m of rope, to represent a 'relative worst case' fall of a rescue-sized load, a sample test using new 12.5 mm PMI EZ Bend rope and a 280 kg mass, resulted in a peak force of 12.9 kN, a total stopping distance (including knots tightening,

rope stretch and slide distance) of 62cm, and only 24 cm of rope slippage through the 540^o™. Results will vary between drop tests and between rope types. Note: due to the distribution of forces between the components that comprise a rescue-sized load, the patient and attendant are subjected to much less (e.g. less than half for two people of equal mass) of the peak force applied to the rope and belay device. It is a misconception that the patient and attendant each experience the same peak force as that applied to the belay rope.

Instructions for Use:

Loading the Rope:

Remove the front plate by depressing the push-pin (fig.10). Wrap the rope around the obround (oval) pulley one-and-a-half (1½) times, or 540 degrees. Since the 540^o™ is symmetrical and bi-directional in design, the wraps may start from either side of the pulley (fig. 6 & 7). Ensure that the 1½ wraps are divided by the rope guide pins, located on each side of the pulley (fig. 8). The device will not work if only half of a wrap is placed over the pulley (fig. 18). Replace the front plate (fig. 10) and confirm that the push-pin balls have completely returned to their locked position (fig. 5). Also ensure that both the running end (free or loose end) and standing part (load-side rope) are in between the two stationary wedges and exiting below the pulley. The keeper cord connecting the front and back plates must be in between the two ropes exiting the device (fig. 11). Use a suitable locking carabiner to attach the 540^o™ to the belay anchor system.


Note: Because the 540^o™ is symmetrical, you can load it from the left or right side, as well as use either rope exiting the 540^o™ as the load rope.

Note: it is an advantage to use a "static" kernmantle rescue rope with low stretch properties .



Since the 540^o™ is already designed to limit the peak force of a 'relative worst-case' fall to no more than 15 kN for 'new' 12.5 mm kernmantle

rescue rope, the additional stopping distance resulting from the use of a rope with more stretch may only add to the risk of the patient and/or attendant striking an obstruction, resulting in severe injury or death.



Ensure that all ropes are protected from potential damage due to rubbing

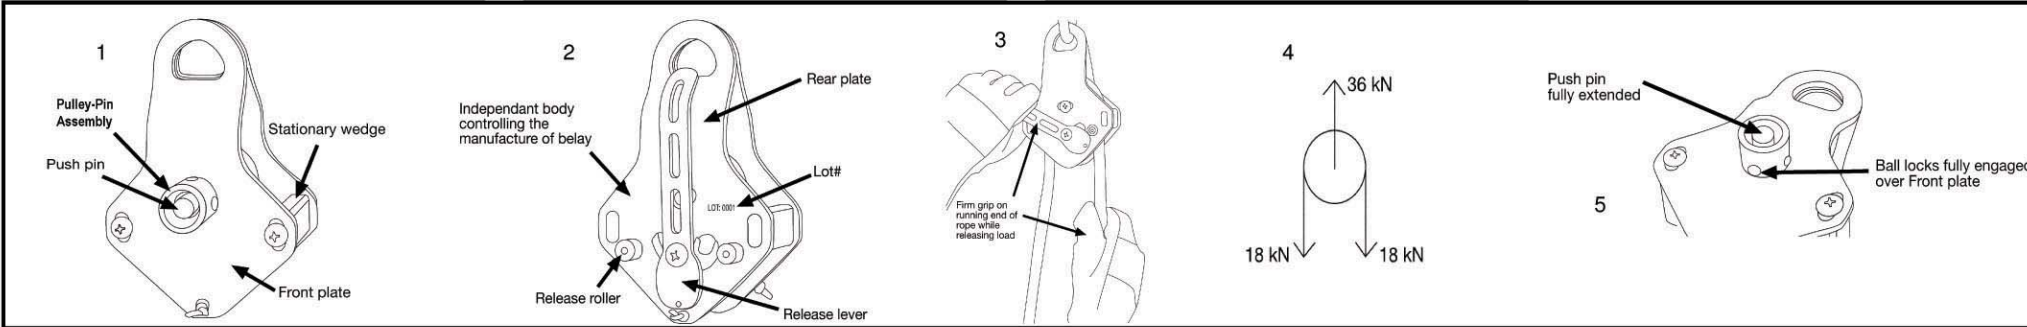

Proper Loading Sequence

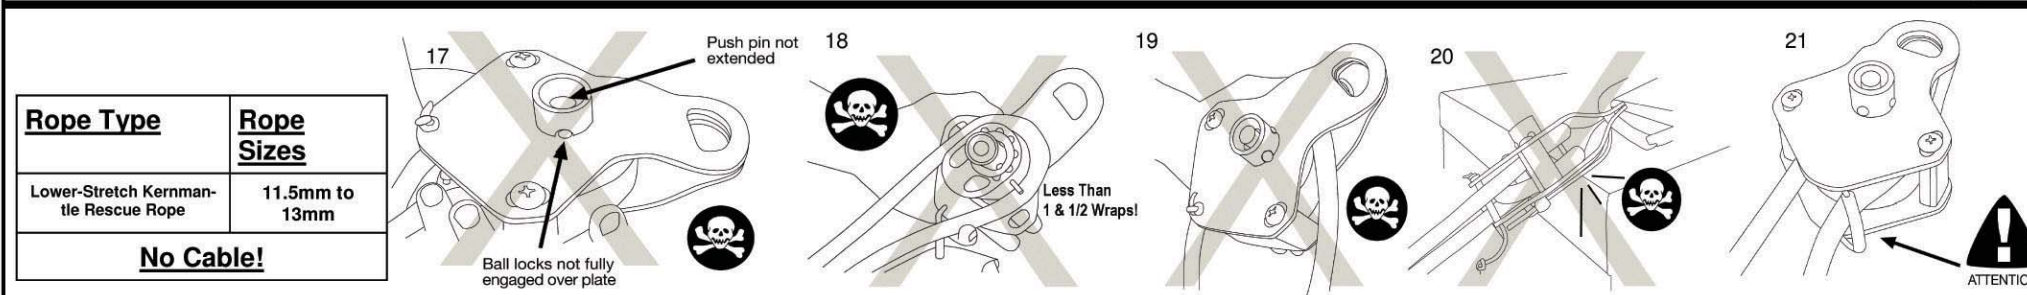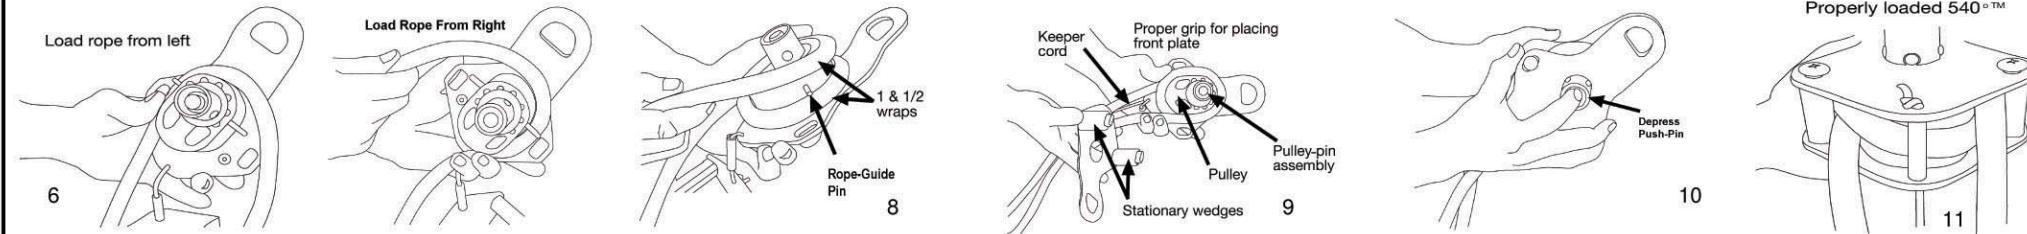

Rope Type	Rope Sizes
Lower-Stretch Kernmantle Rescue Rope	11.5mm to 13mm
No Cable!	

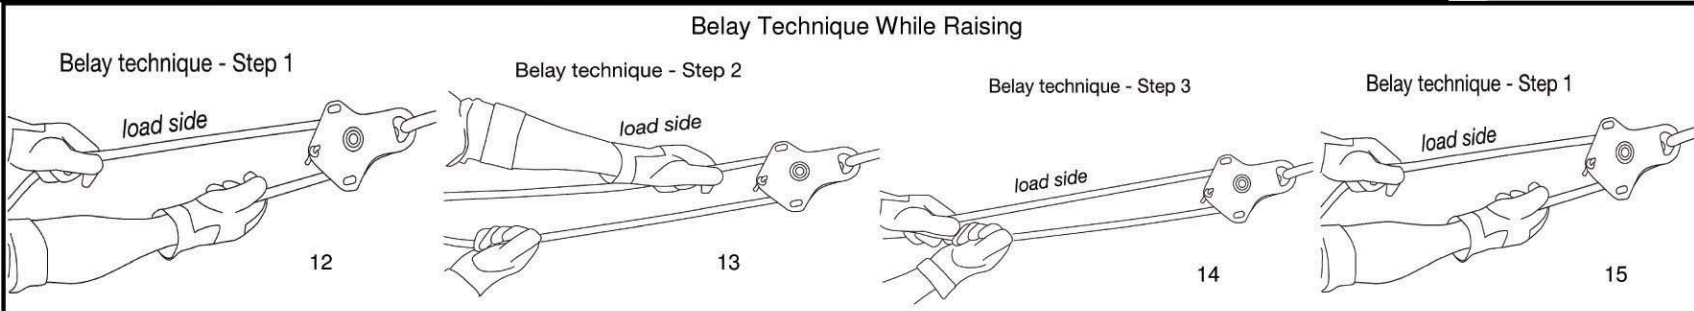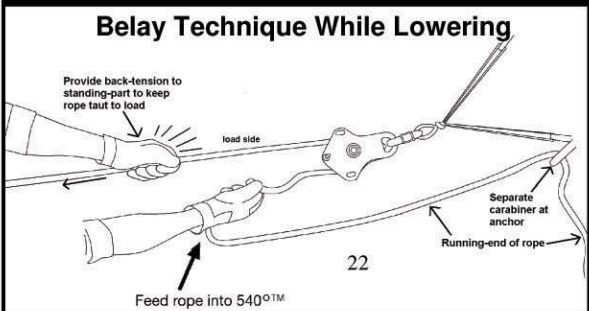

or cutting against abrasive surfaces or sharp edges.

Belaying while Lowering or Raising:

All parts of the 540^o™, including the release-lever, must be completely unimpeded by any obstructions or obstacles that could interfere with proper belay technique, device locking, or release capability (fig. 20). Wear gloves to protect hands; maintain a sufficient distance from the 540^o™ to keep hands free of moving parts. Always maintain a firm grip on the running end of the belay rope; this will ensure rope-locking if the load were to suddenly drop.

IMPORTANT: Self-Locking will occur with sudden drops. However, a “slow” fall and/or a supple/smaller diameter rope will require resistance applied to the running end of the rope to ensure rope-locking. Self-locking for “slow-falls” can be improved by clipping the running end of the belay rope through a separate carabiner attached to the anchor, behind the 540^o™ (fig. 22). **Never** belay the load using the Release Lever to manage the feed, as this may prevent rope-locking if the load were to suddenly drop.

To prevent accidental rope-locking while lowering or raising, feed rope straight into the 540^o™. This is especially important with wet, dirty, muddy, fuzzy or stiff ropes. While lowering, with a gloved hand, provide resistance to the standing part (load-side) and with the other hand, simultaneously feed running-end rope into device (fig. 22). While raising, pull up on the standing part and feed it into the device, and then pull on the running end (fig. 12—16).

Manually Locking Off the Belay Rope

To lock-off the belay, manually trigger the 540^o™ by firmly holding the running end of the rope and sharply tugging the standing part. Additional security can be gained by tying the running end of the belay rope around the standing part with an overhand-on-a-bight knot. If the belay must be left unattended, the 540^o™ must first be locked-off.

Releasing a Locked Belay Rope:

The 540^o™ is NOT to be used as a general descent-control device. If the belay rope is only lightly locked, then quickly reversing the direction of feed can return the pulley to its neutral, or centered position. If this cannot be done, then ensure the mainline is locked-off, and then use the release lever to slowly transfer the tension back to the mainline, maintaining a firm grip on the running end of the rope (fig. 3); ensure that the pulley is returned to its neutral position before continuing.

If the 540^o™ receives a significant shock-force (e.g., catches a rescue-sized load), then the rope in the device may ‘stiffen’ during fall arrest; thus, it may be more difficult to initially release the load until that portion of the rope has passed through the device. *If releasing the load is difficult, you may temporarily thread a webbing sling through the top of the Release Lever to make the pulling easier; remove the webbing directly after releasing the load.*

General Information:

1. Important Notice: Working at heights has inherent risk, and the risk of injury/death can not be eliminated. Do not use this device unless you have read all the instructions, have received proper training, inspected the device before and after each use, and have accepted total responsibility for your safety and the suitability of the application of this device. Do not use this device if you are unable to, or not in a position to assume these risks and responsibilities. Not following the instructions and information can lead to serious injury or death. While some examples of mis-use are identified in the instructions with a "skull & cross-bones" symbol, it is impossible to list or imagine all the possible mis-uses. If there is any doubt or difficulty in understanding the provided information, contact Traverse Rescue™. Additional information regarding NFPA General Use Auxiliary Equipment can be found in NFPA 1500, Standard on Fire Department Occupational Safety and Health Program, and NFPA 1983, Standard on Fire Service Life Safety Rope and System Components.
2. Inspection: If there are any signs of wear, damage or corrosion which might affect the 540^o™ Rescue Belay’s operation, strength or safety, do not hesitate to retire and scrap it, or send it to Traverse Rescue to have it repaired or replaced at our option. It is imperative that the 540^o™ is in good working order prior to use. In addition to the user protocols previously listed (e.g., rope selection, anchor and carabiner suitability, proper loading of the rope, clear of obstructions, belay technique, rope protection, etc.), also check for any device damage, wear, corrosion, deformation, foreign materials or lack of cleanliness.

Note: If the stationary wedge grooves and/or the pulley is worn more than 0.5 mm, then return your 540^o™ to Traverse Rescue™ for parts replacement. Call for cost details.

For safety, a 3-level inspection by a competent inspector is required for the 540^o™:

- I. before and after each use
- II. monitor the condition during use, and
- III. on an annual basis. Maintain an up-to-date inspection record. Keep these instructions for your permanent record; copies should be made and kept with the device for users to reference.

Refer to “Sample Inspection Log” in these instructions for more detail.

3. Cleaning, Maintenance and Storage: Store the 540^o™ away from direct sunlight, extreme temperatures, and deleterious substances or environments. If the 540^o™ becomes soiled or subjected to corrosive environments, then thoroughly wash and rinse it in water. A mild soap may be used. Do not wash with a pressure hose. Wipe off excess water with a clean cloth and allow the 540^o™ to dry in a well ventilated area away from any direct heat source. After washing, lubrication (e.g. Pedro’s Ice Wax, Triflow™ or other “dry” bicycle chain lubricant) of moving mechanisms (e.g. release lever and push-pin assembly) may be required for reliable operation.

If replacing the “keeper” cord, ensure the flexible tube is also re-installed. For any other repairs on the 540^o™, send the unit to Traverse Rescue™.

4. Major Impacts or Falls: While the 540^o™ has been engineered to catch falling rescue-sized loads, if there is any sign of deformation, wear, or any doubt about the safety of the device after a fall, return it for inspection to Traverse Rescue™.
5. Do not expose the 540^o™ Rescue Belay to any flame or high temperature and carry the device where it will be protected as the Keeper Cord or other parts could melt, burn or otherwise fail.
6. Take care to keep and store in a safe place, all User Instructions and information for your new 540^o™ Rescue Belay. Copy the User Instructions and other information to keep with the device for easy reference.
7. Refer to the User Instructions and other information before and after each use.

The 540^o™ has been designed to limit peak force and stopping distance, which are two diametrically opposed needs. For example, for a 1 m drop on 3 m of 12.5 mm kernmantle rescue rope with a 280 kg mass (slightly heavier than a

NFPA 2 person load), the 540^o™ Large is designed to limit the peak force to below 15 kN and arrest the falling load in less than 1 m of stopping distance, including rope stretch, knots tightening up, and any slippage through the belay device; it must be noted that at the upper and lower limits of allowable rope diameters, small diameter ropes (e.g. 11.5 mm) may result in greater stopping distances, and larger rope diameters (e.g. 13 mm) may result in greater peak forces than target levels. *Results will vary with different rope diameters, brands, or other environmental influences such as wet, muddy or iced ropes.*

Traverse Rescue, Guarantee

The 540^o™ Rescue Belay is guaranteed for a period of one year against any manufacturing or material defects and/or faults. Limitations to this guarantee are: wear and tear through normal use, unauthorized alterations or modifications of any kind, improper storage, misuse, negligence, improper cleaning, contact with chemicals as well as damage due to accidents etc. It also excludes damage due to use for which it was not expressly designed.

Call Traverse Rescue™ toll free to purchase a copy of our 540^o™ Rescue Belay video which provides visual instruction.

For your training needs visit
www.traverserescue.com/resources.php

The following space was purposely left open

Sample Inspection Log
Keep these instructions for your permanent record; copies of the following tables should be made and kept with the device for users to reference.

540 ^o ™ Rescue Belay	
Batch Number:	
Purchase Date:	
Date of First Use:	
Owner:	

Annual Inspection of 540 ^o ™ Rescue Belay			
Date:	OK	Inspected By:	Comments:



CONTACT INFORMATION
 TRAVERSE RESCUE
 755 THE QUEENSWAY E., SUITE 8
 MISSISSAUGA, ONTARIO
 CANADA L4Y 4C5
 WEB SITE: www.traverserescue.com
 EMAIL: info@traverserescue.com
 TEL.: (905) 279-7866 Fax: (905) 615-1367
 TOLL FREE: 1-866-998-7866

COPYRIGHT TRAVERSE RESCUE
 DO NOT COPY WITHOUT EXPRESS WRITTEN PERMISSION
 PRINTED IN CANADA ON RECYCLED PAPER
 MADE IN CANADA